RoHS COMPLIANT

REVISION INFORMATION		
Rev.	Rev. Date	Brief Description

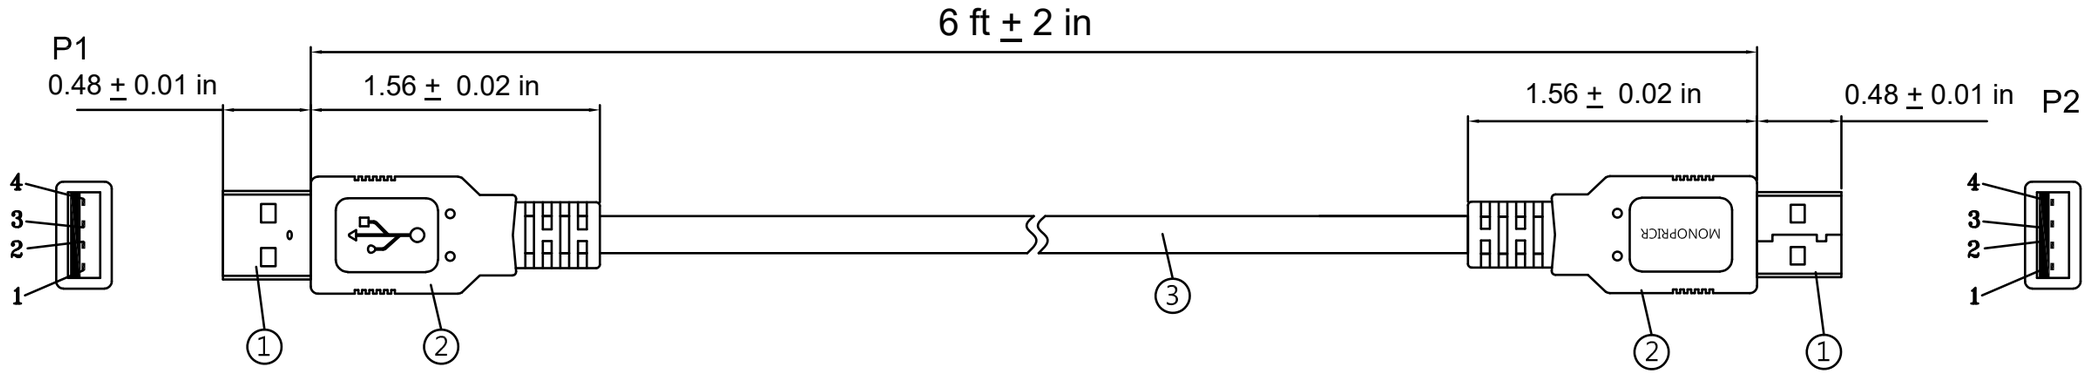

USB A/M MOLDING TYPE

USB A/M MOLDING TYPE

PIN OUT

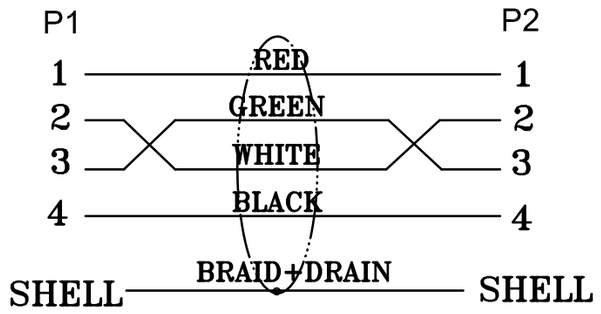

PID	ft	± / in
5441	1.5	0.78
5442	3	1.18
5443	6	2
5444	10	2
5445	15	2.95

CABLE ELECTRICAL TEST:

<1>.100% OPEN SHORT & MISS WIRE TEST.

<2>.INSULATION RESISTANCE: DC300V 10Mohm MIN

<3>.CONDUCTER RESISTANCE:3 ohm MAX.

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	
3	CABLE	UL2725 [(28AWGX1P+24AWG*2C+A+B+D)x1C BLACK JACKET OD4.5 MARKING: " 兄AWM 2725 28AWG/1P +24AWG/2C VW-1 80°C 30V E202584 # C 兄AWM 80°C 30V FT1 | A E202584 # www.monoprice.com" ⚠1	1	
2	OUTER MOLD	45P PVC BLACK IN COLOR	2	
1	CONNECTOR	USB 2.0 A/M PIN GOLD PLATED 3U SHELL GOLD PLATED INSULATOR WHITE	2	

MONOPRICE

DESCRIPTION :
Monoprice USB 2.0 USB-A to USB-A Cable - 28/24AWG
Gold Plated Black 6ft

PID # : 5443

DATE : 2017/01/10 | UNIT : ft and in | FILE NAME: