
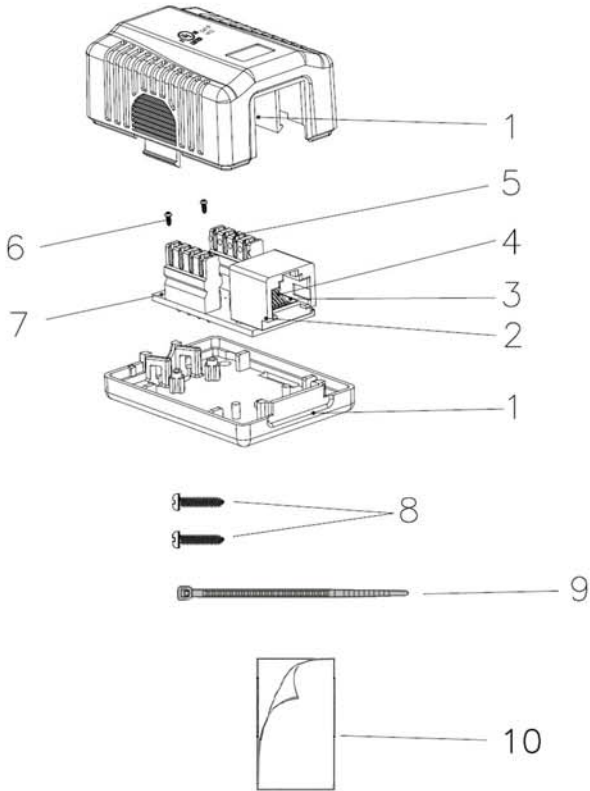


VERSION INFORMATION (Vender)			
Rev.	Rev. Date	Modified By	Brief Description
V1	Jan 8 2020	Kelvin	Initial Issue
V2	Feb 02 2023	James	Change PC Board
V3	May 02 2023	James	Update Prodcut Spec.

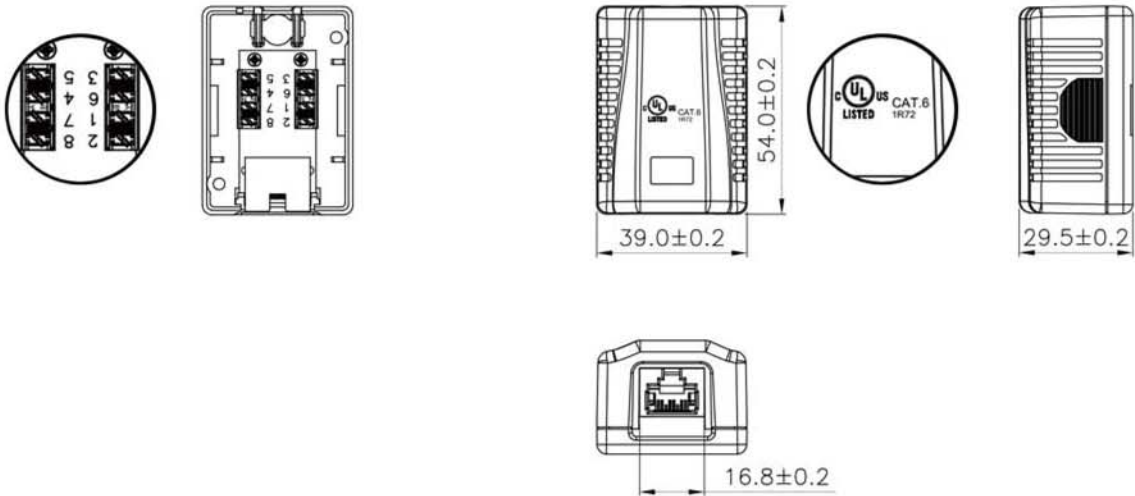

SCALE 1/2

- Performance :
- a. T568A & T568B wiring printing on IDC.
 - b. Insertion force : 20N max. (IEC 60603-7-4).
 - c. Retention strength : 7.7 kg between Jack and Plug.
 - d. Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568C.2)
 - e. Life(mating cycles) :
 - *Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-4).
 - *IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.
 - f. The Cat.6 transmission performance is in compliance with the ANSI/TIA 568 C.2 standard.

10	Double Sided Tape	EVA Foam Adhesive with Released Paper, 47.0x27.0x2.0mm	1	PC
9	Cable Tie	Nylon 66, UL 94V-2, 8.0x2.5mm	1	PC
8	Screw	M3.5x16.0xø6.0mm	2	PCS
7	PCB	FR4. UL 94V-0	1	PC
6	Screw	M2.0x6.0xø3.3mm	2	PCS
	5-2 IDC Terminal:	Phosphor Bronze with Tin plated		
	5-1 IDC Housing:	PC+Glass Fiber, UL 94V-2		
5	IDC		2	PCS
	4-2 Finish:	50 micro-inch Gold plated on Plug contact area		
	4-1 Material:	Phosphor Bronze with Nickel plated		
4	RJ45 Jack Contact		1	PC
3	Contact Bracket	PBT+Glass Fiber, UL 94V-0, Black	1	PC
2	RJ45 Jack Housing	PBT+Glass Fiber, UL 94V-0, Black	1	PC
1	Case	ABS. UL 94V-0, White	1	Set
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

 **MONOPRICE**

VENDOR CODE : V16988		DESCRIPTION : Surface Mounted Box, CAT.6 Single	
APPROVED BY PM & DATE :		PID # : 7092	
PM PRINT NAME :		DATE : 2023/03/22	UNIT : MM
		SHEET: 1 OF 2	FILE NAME: PID_PRODUCT