


REVISION INFORMATION		
Rev.	Rev. Date	Brief Description
V1	2020-06-16	Initial Issue

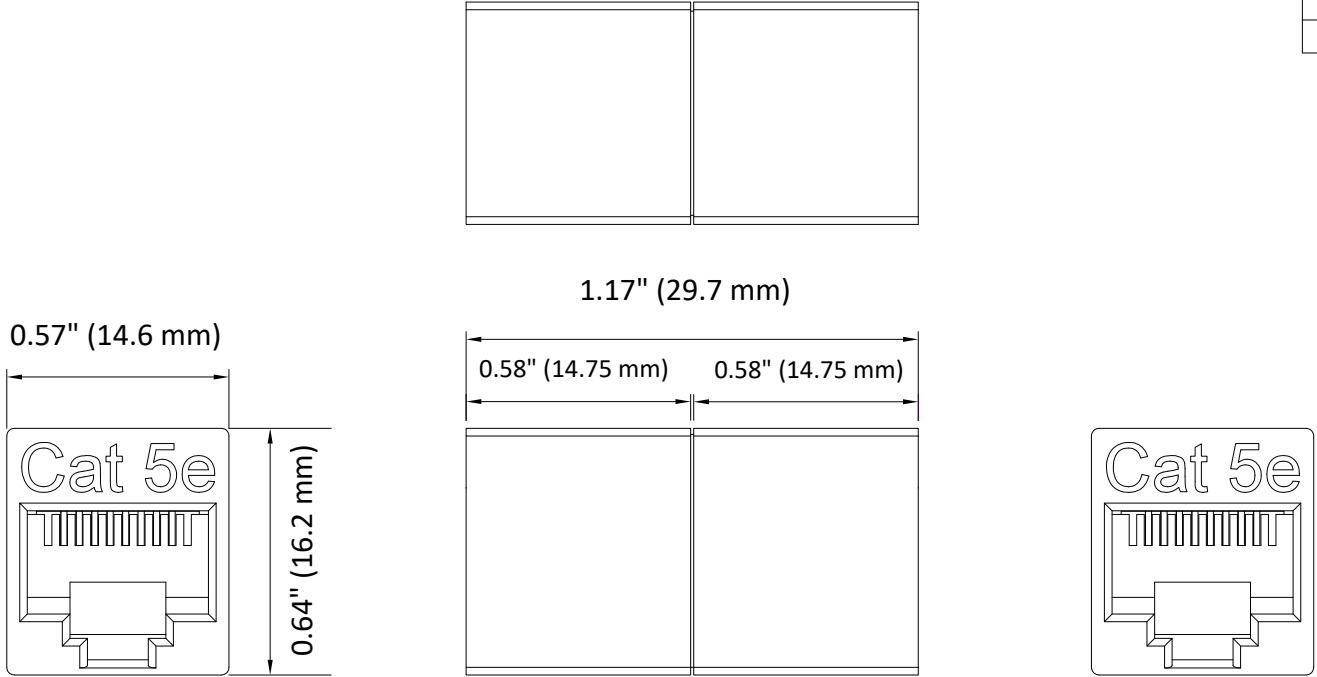

MATERIAL
KEYSTONE JACK HOUSING :PC,UL94V-0,
SPRING PIN: PHOSPHOR BRONZE C5210-EH, T=0.35MM;
PLATING NICKEL UNDERCOAT,
BESIDES PLATING 50U" GOLD OVER THE PLATED
SURFACE ON CONTACT AREA.

PHYSICAL CHARACTERISTICS
INSERTION LIFE : 750 MATING CYCLES WITH FCC
COMPLIANT 8P PLUG.
CONTACT FORCE : 100 GRAMS WITH FCC COMPLIANT 8P
PLUG.
PLUG RETENTION FORCE : 11 LBF MIN.
OPERATING TEMPERATURE RANGE : -10 C TO 60 C.
STORAGE TEMPERATURE RANGE : -40 C TO 68 C.
HUMIDITY : 10%~90%RH.

ELECTRICAL
INSULATION RESISTANCE : 500 MΩ MINIMUM.
VOLTAGE PROOF (CONTACT TO CONTACT) : 1000 V AC.
DC CURRENT RATING : 1.5 Amps.
INPUT TO OUTPUT D.C. RESISTANCE : 200 mΩ MAXIMUM.
CONTACT RESISTANCE : 20 mΩ MAXIMUM.

③				
②				
①				
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION :		
Monoprice Cat5e RJ45 Modular Inline Coupler, Black		
PID # 7283		
DATE : 2020/06/16	UNIT : in/mm	FILE NAME: 7283_Technical Specs_200616