


REVISION INFORMATION		
Rev.	Rev. Date	Brief Description
V1	2020/06/19	Initial Issue

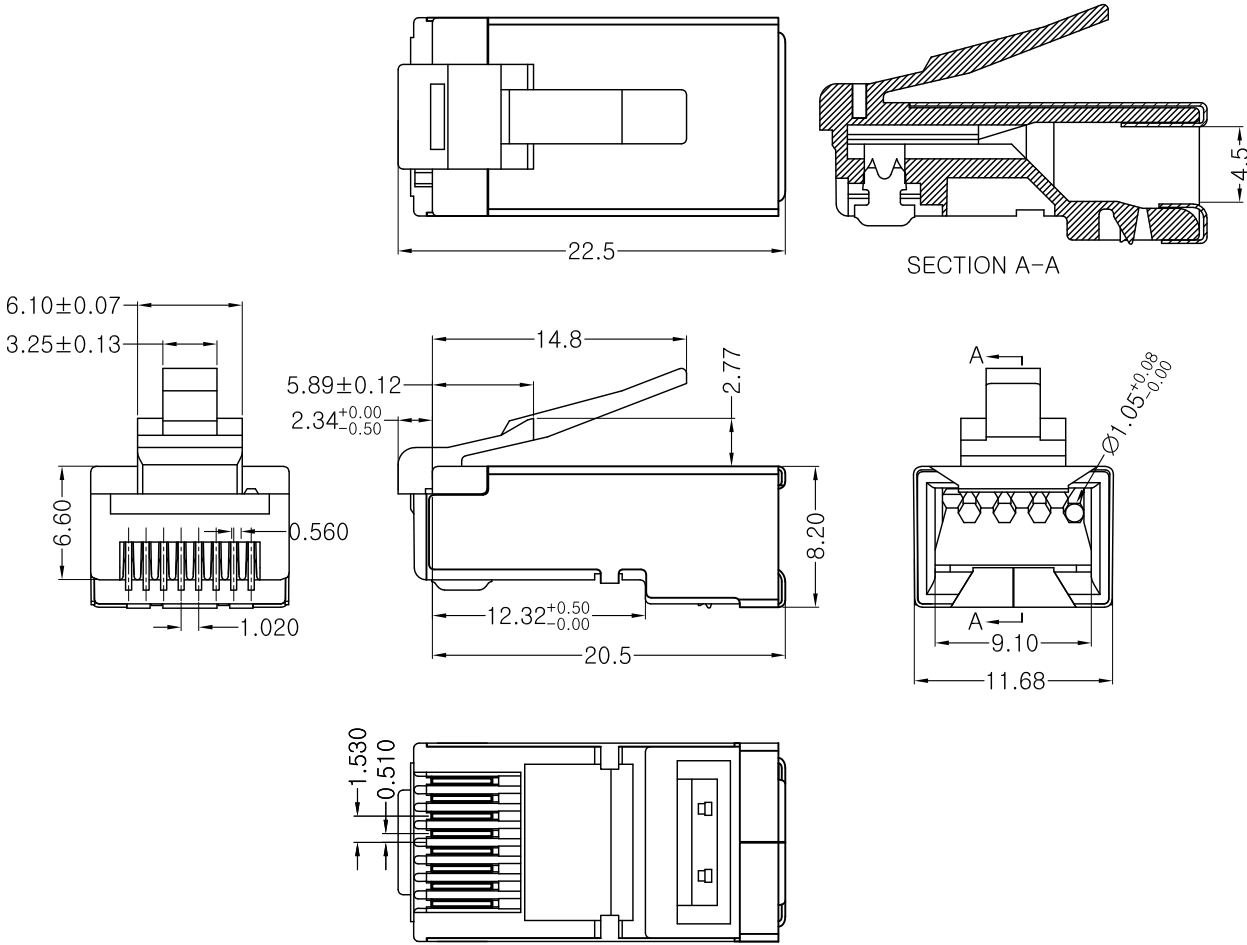

- NOTES:
- 1.Operation Temperature:-40℃~+85℃.
 - 2.Electrical Characteristics:
 - 2.1>Rated Current:125V AC,1.5A@25℃.
 - 2.2>Contact Resistance:20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown.
 - 3.Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force:30N Max.
 - 3.2>Durability:750 cycles Min.
 - 4.Environmental compliance:
 - 4.1>the products are compliant with the RoHS, and REACH etc.
 - 5.CONDUCTOR:STRANDED&SOLID WIRE,23AWG,24AWG.
(It can be used for the wire OD fromØ1.00~Ø1.05mm.)

1	Modular Plug	Shell	1PCS	43*20**09	Square hole	Au: G/F" ☐ 1u" ☐ 3u" ☐ Ni:80u" ☒	Brass ☒ Spcc ☐	DIMENSIONAL TOLERANCE X.X ±0.20 X.XX ±0.10 X.XXX ±0.05 ANGLE ±2°
		Contacts	8PCS	/	2Prongs ☒ 3Prongs ☐	G/F" ☐ 1u" ☐ 3u" ☐ 6u" ☐ 15u" ☐ 30u" ☐ 50u" ☒ OTHER ☐	Brass ☒ Phosphor copper ☐	
		Housing	1PCS	21*0651**	CAT6/FTP HOUSING/LONG BODY/4UP AND 4DOWN		94V-2 ☒ 94V-0 ☐	
NO	NAME	QTY	PART NO.	DESCRIPTION		MATERIAL		

 MONOPRICE		
DESCRIPTION Monoprice Cat6 RJ45 Shielded Modular Plugs for Round Solid/Stranded Cable, 50u, 2 Prongs, Clear, 100-Pk		
PID # 7301		
DATE: 2020/06/19	UNIT: mm	FILE NAME: PID_PRODUCT