


Rev.	Rev. Date	Brief Description
V1	2020/06/19	Initial Issue

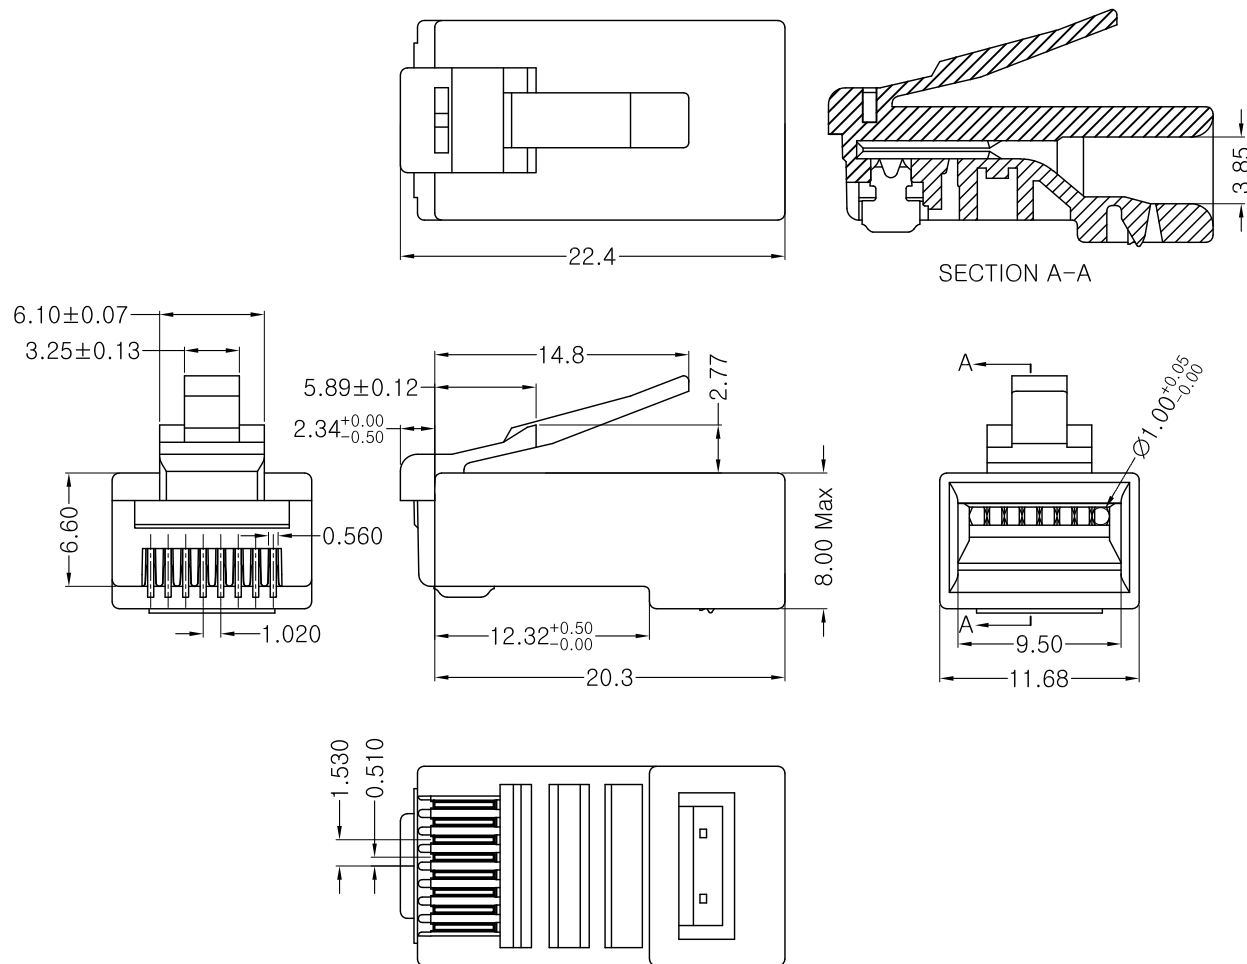

NOTES:

- 1.Operation Temperature:-40℃~+85℃.
- 2.Electrical Characteristics:
 - 2.1>Rated Current:125V AC,1.5A@25℃.
 - 2.2>Contact Resistance:20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown.
- 3.Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force:30N Max.
 - 3.2>Durability:750 cycles Min.
- 4.Environmental compliance:
 - 4.1>the products are compliant with the RoHS, and REACH etc.
- 5.CONDUCTOR:STRANDED&SOLID WIRE,23AWG,24AWG.
(It can be used for the wire OD fromØ0.96~Ø1.02mm.)

DESCRIPTION:

Monoprice 8P8C RJ45 Modular Plugs for Flat Solid/
Stranded Cable, 50u, 2 Prongs, Clear, 50-Pk

PID #: **7322**

DATE :
2020/06/19

UNIT :
mm

FILE NAME:
PID_PRODUCT

1	Modular Plug	Contacts	8PCS	/	2Prongs ☒	G/F" ☐	1u" ☐	3u" ☐	6u" ☐	Brass ☒	DIMENSIONAL TOLERANCE
					3Prongs ☐	15u" ☐	30u" ☐	50u" ☒	OTHER ☐	Phosphor copper ☐	
		Housing	1PCS	20*0488**	CAT5E 8P8C/UTP HOUSING/LONG BODY/FLAT					94V-2 ☒ 94V-0 ☐	
NO	NAME		QTY	PART NO.	DESCRIPTION					MATERIAL	X.X ±0.20 X.XX ±0.10 X.XXX ±0.05 ANGLE ±2°