




Rev.	Rev. Date	Modified By	Brief Description
V1	2023/05/12	Darrick	Initial Issue
V2	2023/06/21	Darrick	core wire have updated to Black and added more dimension of cable

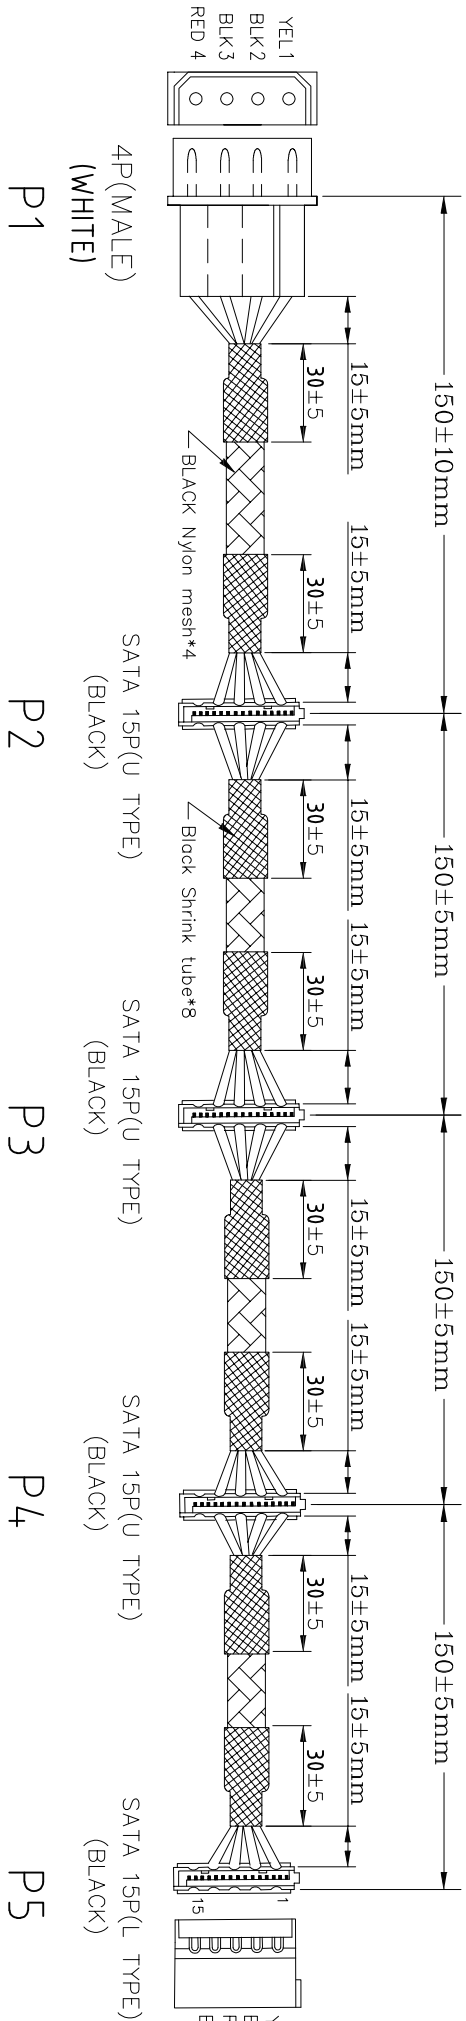

ITEM/NO.	Product length	Code
8794	24in [(150±15mm)×4]	844660087946

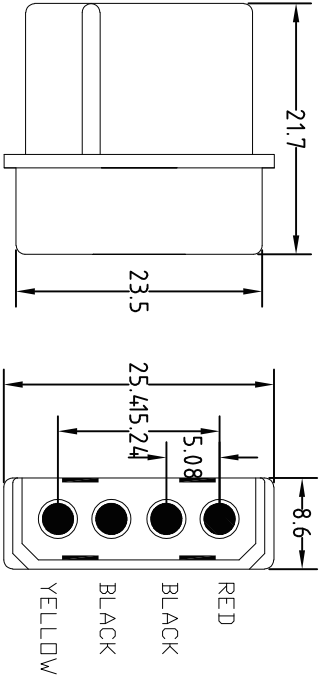


4P housing male connector



- Electrical character:
- 1)100% Open/short/Intermittent testing
 - 2)Withstanding voltage:DC 300V AT 10ms.
 - 3)Insulation resistance:10M Ohm(min)
 - 4)Conductive resistance: 3 Ohm(max)
- Conductor: Tinned copper 26/0.16mm
Jacket: PVC, Color: BLACK/RED/YELLOW
ø1.8mm

Pin Assignment

P1	P2	P3	P4	P5
1 Yellow	1+2+3 Yellow	1+2+3 Yellow	1+2+3 Yellow	1+2+3 Yellow
2 Black	4+5+6 Black	4+5+6 Black	4+5+6 Black	4+5+6 Black
3 Black	10+11+12 Black	10+11+12 Black	10+11+12 Black	10+11+12 Black
4 Red	7+8+9 Red	7+8+9 Red	7+8+9 Red	7+8+9 Red

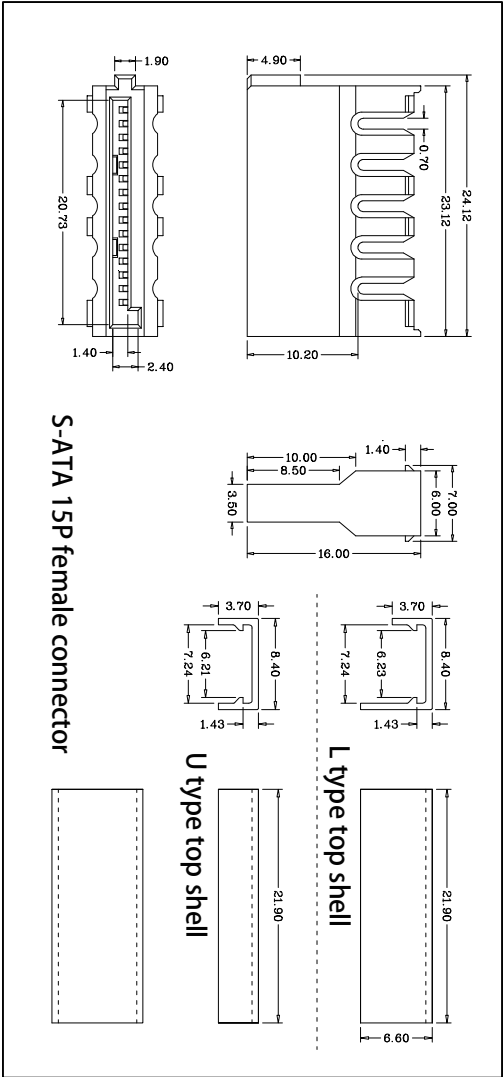

S-ATA 15P female connector

⑤	Overmold	PVC,black	8	9
④	Connector	4P HOUSING MALE, WHITE COLOR	1	pcs
③	Connector	S-ATA 15P female connector(L TYPE),pin G/F,black insulation	1	pcs
②	Connector	S-ATA 15P female connector(U TYPE),pin G/F,black insulation	3	pcs
①	Cable	UL1007,NON-FOLI,20AWG/TC,4C,BLACK/RED/YELLOW color wire,PVC jacket	See Table A	mm
NO.	PART NAME	SPECIFICATION DESCRIPTION		

VENDOR CODE: V16988

APPROVED BY PM & DATE:

PM PRINT NAME:

DESCRIPTION: 24in 4pin MOLEX Male to 4x 15pin SATA II Female Power Cable with Net

PID #: 8794

DATE: 2023/05/12UNIT: MM SHEET: 1 OF 1 FILE NAME: 8794_Spec_20230621