



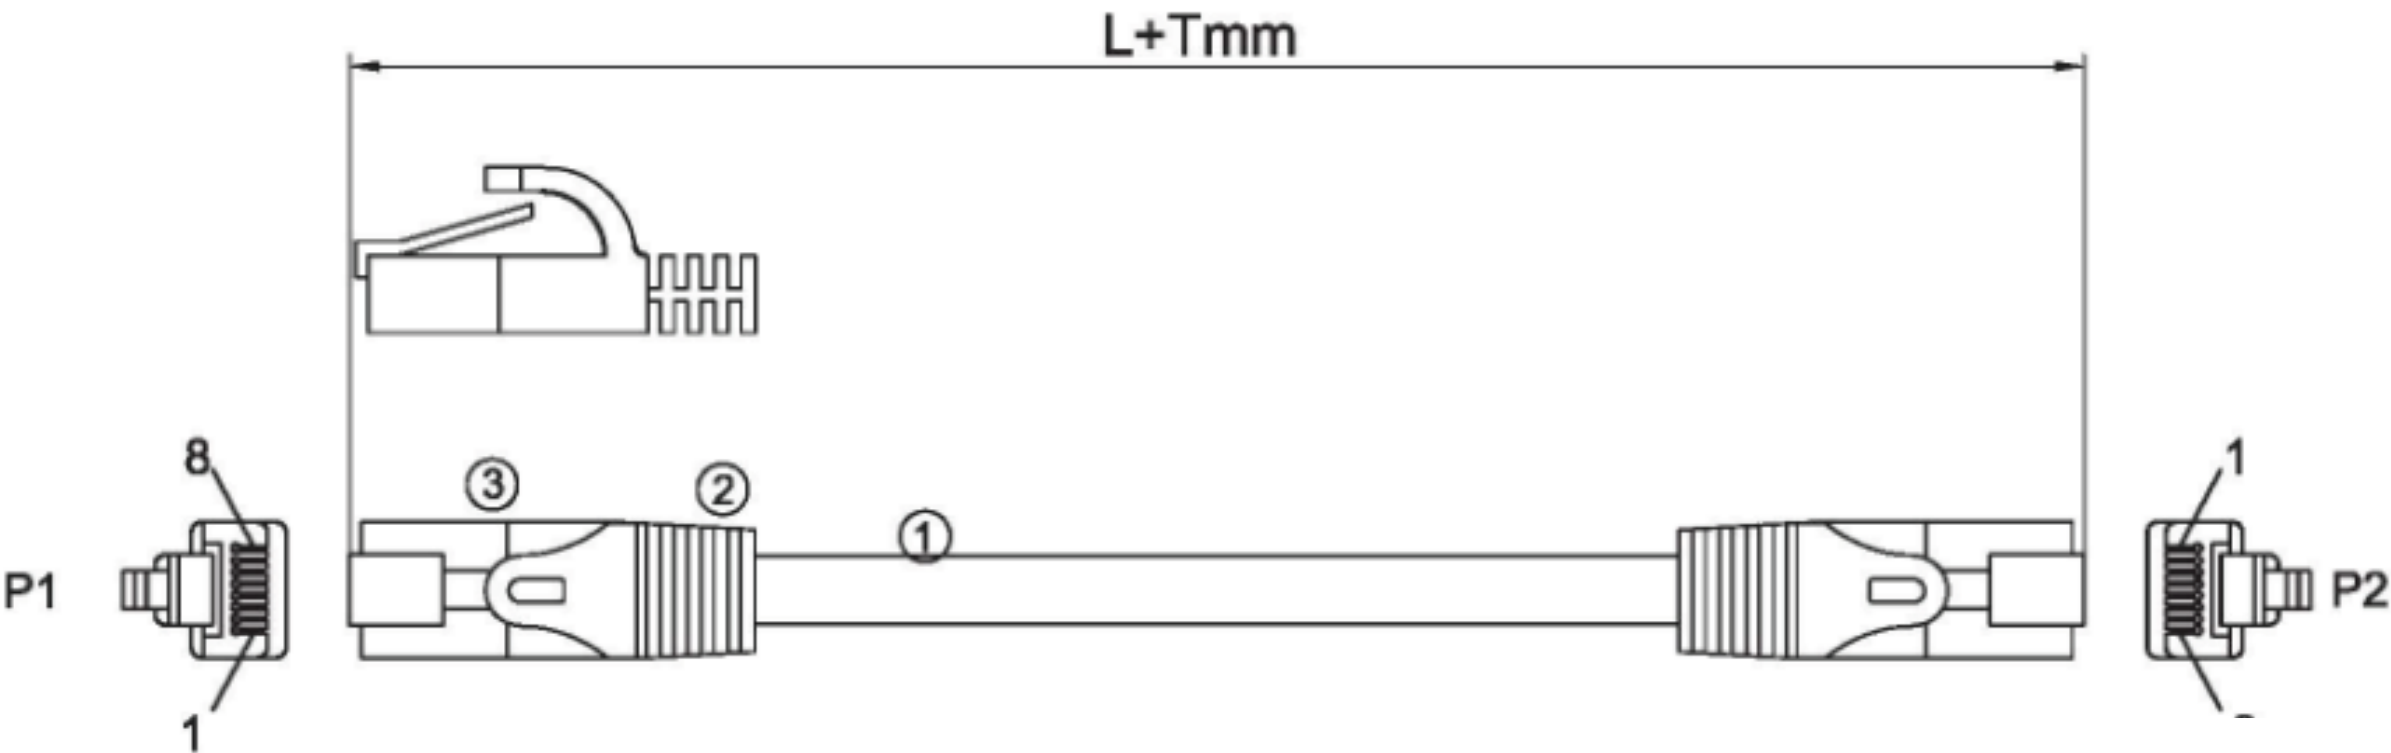

MARKING:30AWG/4P UTP CAT.5 ENHANCED —RoHS Compliant

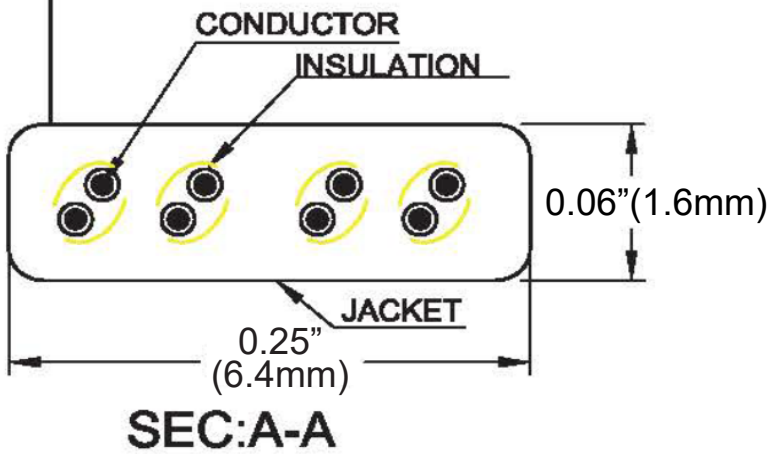

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

NOTE:
1.ELECTRICAL TEST:
<1> 100% OPEN SHORT & MISS WIRE TEST.
<2> FLUKE CHANNEL LEVEL 1DB↑
<3> CONDUCTOR RESISTANCE: L≤10M 10ΩMAX
10<L≤20M 15ΩMAX
20<L≤20M 25ΩMAX

Conductor		Bare Copper 30AWG 7/0.10±0.005mm		
INSULATION		Thickness: MIN at any point:0.15mm MAX AVG: 0.25mm Diameter:0.60±0.2MM		
Jacket	PVC	Thickness: MIN at any point:0.15mm MAX AVG: 0.3mm Diameter:1.6*6.4±0.3MM		
3	RJ45 PLUG	RJ45 PLUG: 8P8C 50U" GOLD PLATED SHORT BODY TRANSPARENT PLUG;		
2	MOLDED	PVC MOLDED BOOT.		
1	CABLE	CAT5E U/UTP[30AWG(7/0.10BC±0.050)]*4 OD:Ø1.6*6.4±0.3MM PVC JACKET.		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

MONOPRICE

DESCRIPTION :		
Monoprice™ Cat5e Ethernet Patch Cable - Snagless, RJ45, Flat, Stranded, 350MHz, UTP, Pure Bare Copper Wire, 30AWG, 0.5ft, Black		
PID # : 9544		
DATE :	UNIT : IN / MM	FILE NAME: