



1	2
CUSTOMER NAME	Monoprice
CUSTOMER Part No.	

7	8	9	10
DATE	REV	DESCRIPTION	BY
2017.03.10	A/0	NEW	LHY

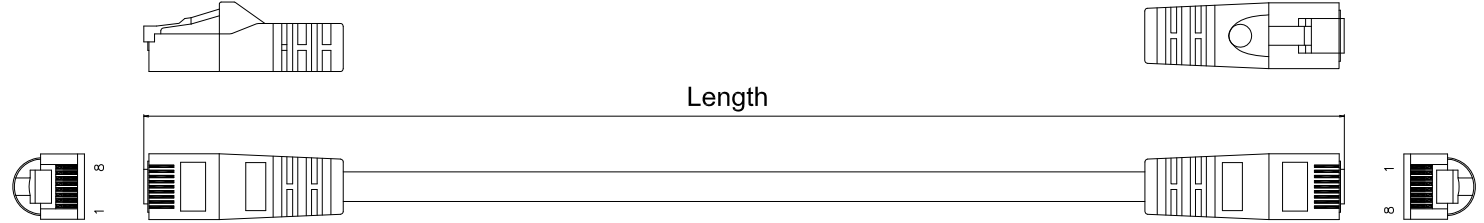

Marking: YFC Monoprice CAT.6 UTP PATCH ETL CONFORMS ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-6-2 & IEC 60332-1-2 ▲ 24AWGX4P CMX(UL) E164469-XX RoHS WWW.MONOPRICE.COM

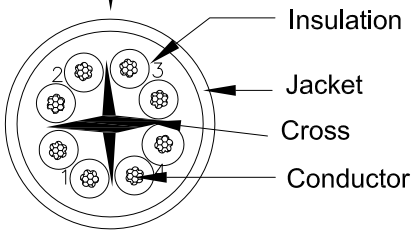

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

Conductor		Bare Copper 24AWG 7/0.196±0.008mm
Insulation		Thickness:MIN at any point:0.20mm MAX AVG:0.30mm Diameter:1.03±0.06mm
Jacket	PVC	Thickness:MIN at any point:0.50mm MAX AVG:0.55mm Diameter:6.0±0.15mm
Wire	CAT.6 UTP STR 24AWG*4P	
Plug	New fullboot 8P8C 50u"	
Color	YY	
Length	XXFT	

Length	Tolerance
0.5FT	±15mm
1FT	±15mm
2FT	±15mm
3FT	±15mm
5FT	±15mm
7FT	+15mm -20mm
10FT	+15mm -20mm
14FT	+15mm -20mm
15FT	±20mm
20FT	+40mm -20mm
25FT	+40mm -20mm
35FT	+50mm -20mm
50FT	+60mm -20mm
75FT	+70mm -20mm
100FT	+70mm -20mm

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8



Draw.No.	ITEM	CAT.6 UTP 24AWGX4P	
SCALE	DRAWN	DATE	2017.03.10
UNIT	CHECKED	DATE	
	SHEET	1 OF 1	

