



1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME	Monoprice								
CUSTOMER Part No.									

DATE	REV	DESCRIPTION	BY
2017.4.19	A/0	NEW	LJW

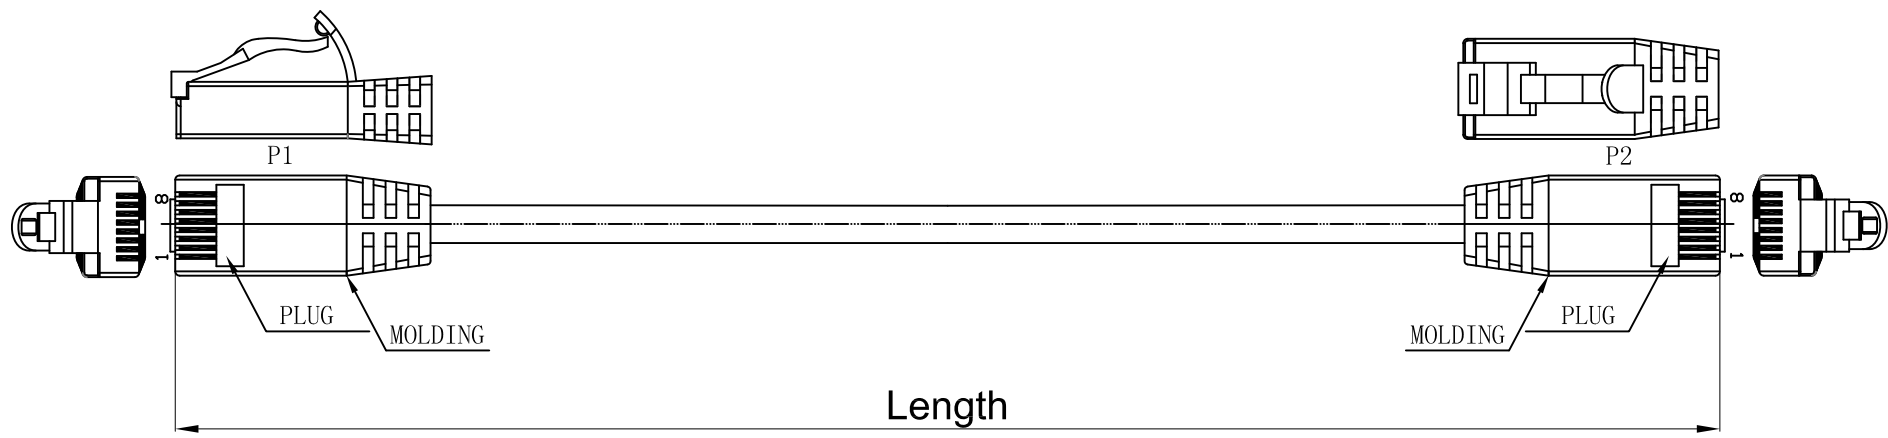

Marking: YFC Monoprice CAT.7 SSTP PATCH 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2
 & EN 50288-4-2 & IEC 60332-1-2 ▲ 26AWGX4P CMX(UL) c(UL) CMH E164469-XX
 WWW.MONOPRICE.COM

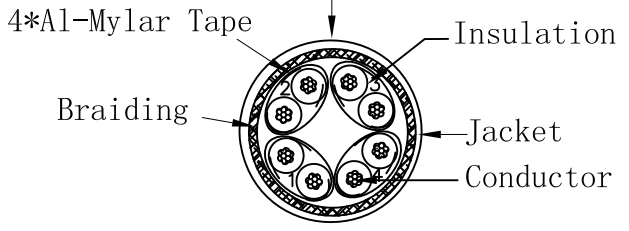

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1	↔	1	WHT/ORG
2	↔	2	ORG
3	↔	3	WHT/GRN
6	↔	6	GRN
4	↔	4	BLU
5	↔	5	WHT/BLU
7	↔	7	WHT/BRN
8	↔	8	BRN

Conductor	Bare Copper 26AWG
Insulation	Thickness:MIN at any point:0.27mm MAX AVG:0.29mm
	Diameter:1.07±0.05mm
Jacket	PVC
Wire	Thickness:MIN at any point:0.50mm MAX AVG:0.55mm
	Diameter:5.7±0.20mm
Wire	CAT.7 SSTP 26AWGX4P
Plug	8P8C 50U"
Length	XX
Color	YY

Key Size	Tolerance		
	△	3RD	⊕
Length (mm)	Critical	Normal	General
0-15	±0.05	±0.10	±1.0
15-60	±0.10	±0.20	
60-150	±0.15	±0.35	±1.5
150-350	±0.20	±0.50	
350-1000	±0.40	±0.65	±2.0



Part No.	CAT.7 S8TP 26AWGX4P PVC L-1036		
Description	mm	APP工程課	CHECKER
UNIT	1/1	2017.04.20	DRAWER
PAGE		工程課	LJW
Draw.No.			