



1	2
CUSTOMER NAME	Monoprice
CUSTOMER Part No.	





7	8	9	10
DATE	REV	DESCRIPTION	BY
2017.04.19	A/0	NEW	LJW



P1




P2

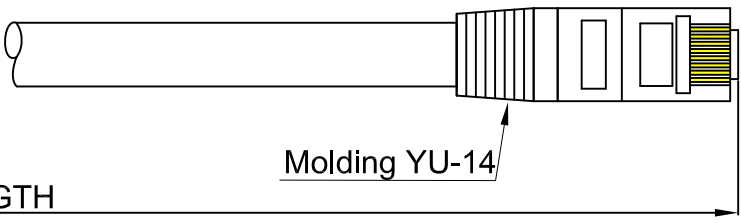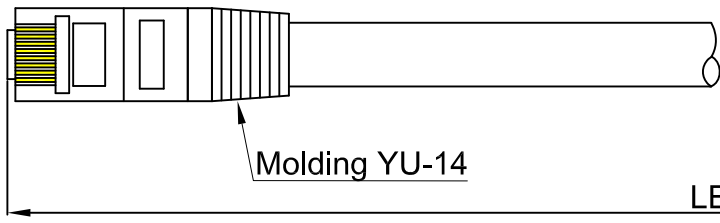

LENGTH

Marking: YFC Monoprice CAT.5E UTP 350Mhz ETL Verified ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-3-2 & IEC 60332-1-2 ▲ 24AWGX4P CMX(UL) E164469-XX RoHS COMPLIANCE V10277 WWW.MONOPRICE.COM

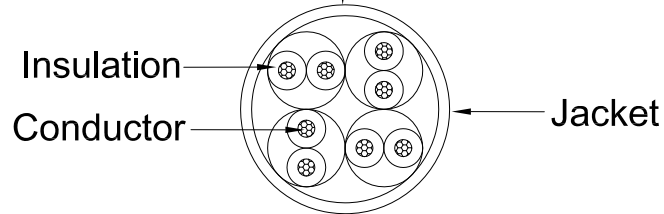

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1	↔	1	WHT/ORG
2	↔	2	ORG
3	↔	3	WHT/GRN
6	↔	6	GRN
4	↔	4	BLU
5	↔	5	WHT/BLU
7	↔	7	WHT/BRN
8	↔	8	BRN

Conductor	Bare Copper 24AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.96±0.06mm
Jacket	PVC Thickness:MIN at any point:0.42mm MAX AVG:0.48mm Diameter:5.4±0.20mm
Wire	CAT 5E UTP 24AWGX4P
Plug	YU-14 8P8C 50u"
Length	6.1M +40mm -20mm
Color	BK012

MONOPRICE

Part No.	CAT 5E UTP 24AWGX4P YU-14		
Description	mm	APPROVAL	CHECKER
UNIT	1/1	2017.04.20	DRAWER
PAGE		鍾曙光	LJW