



| | |
|-------------------|-----------|
| 1 | 2 |
| CUSTOMER NAME | Monoprice |
| CUSTOMER Part No. | |


| | | | |
|------------|-----|-------------|-----|
| 7 | 8 | 9 | 10 |
| DATE | REV | DESCRIPTION | BY |
| 2017.04.19 | A/0 | NEW | LJW |




P1



P2

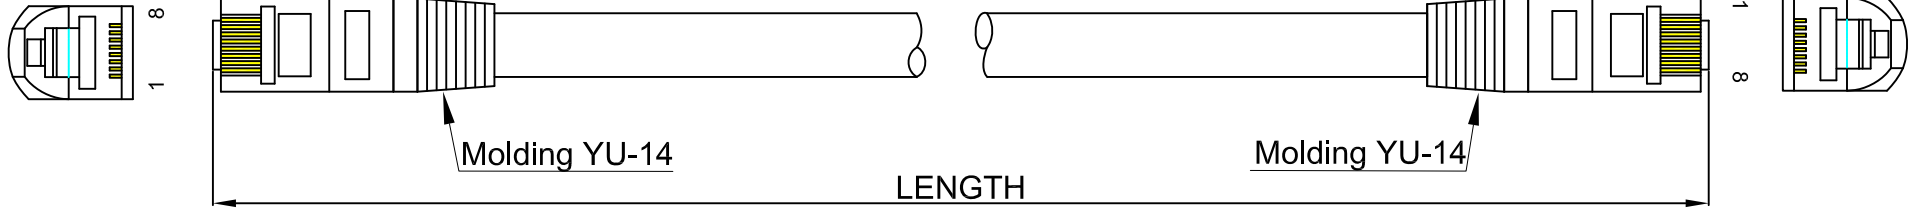

Marking: **YFC Monoprice CAT.6 UTP 550Mhz ETL CONFORMS ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-6-2 & IEC 60332-1-2 ▲ 24AWGX4P CMX(UL) E164469-XX RoHS COMPLIANCE V 10277 WWW.MONOPRICE.COM**

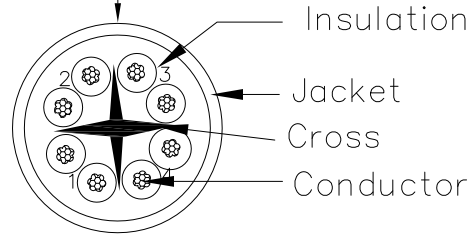

| PINOUT | | | |
|-----------|---|-----------|---------|
| P1(T568B) | | P2(T568B) | WIRE |
| 1 | ↔ | 1 | WHT/ORG |
| 2 | ↔ | 2 | ORG |
| 3 | ↔ | 3 | WHT/GRN |
| 6 | ↔ | 6 | GRN |
| 4 | ↔ | 4 | BLU |
| 5 | ↔ | 5 | WHT/BLU |
| 7 | ↔ | 7 | WHT/BRN |
| 8 | ↔ | 8 | BRN |

| | |
|------------|---|
| Conductor | Bare Copper 24AWG |
| Insulation | Thickness:MIN at any point:0.20mm MAX AVG:0.30mm |
| | Diameter:1.03±0.06mm |
| Jacket PVC | Thickness:MIN at any point:0.50mm MAX AVG:0.55mm |
| | Diameter:6.2±0.20mm |
| Wire | CAT.6 UTP STR 24AWGX4P |
| Plug | YU-14 8P8C 50U" |
| Length | 0.91M±15mm |
| Color | YE406 |

MONOPRICE

| | | | |
|-------------|-------------------------|---------|--------|
| Part No. | | | |
| Description | CAT.6 UTP STR PVC YU-14 | | |
| UNIT | mm | CHECKER | DRAWER |
| PAGE | 1/1 | | |
| Draw.No. | | | LJW |

APPROVAL 2017.04.24
鍾曙光