


RoHS COMPLIANT

REVISION INFORMATION

Rev.	Rev. Date	Brief Description

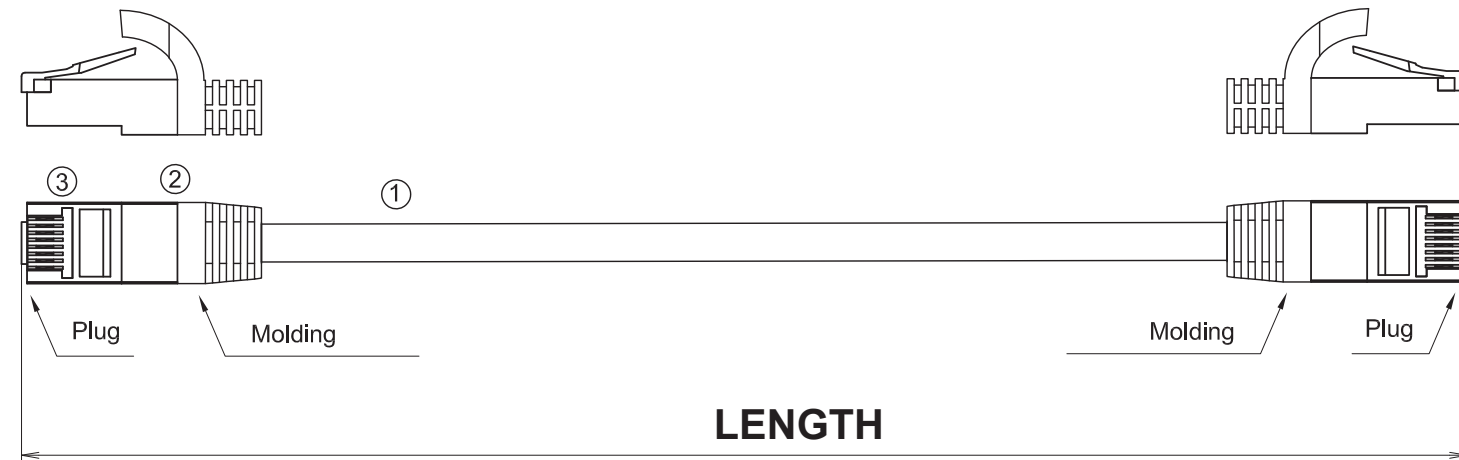

SZ Marking: CAT.6 UTP 550Mhz ETL CONFORMS ANSI/TIA-568.2-D & ISO/IEC 11801 ED.2 & EN 50288-6-2 & IEC 60332-1-2 ▲ 24AWGX4P CM(UL) E164469-B2 ▲ RoHS COMPLIANCE


VN Marking: CAT.6 UTP 550Mhz ETL CONFORMS ANSI/TIA-568.2-D & ISO/IEC 11801 ED.2 & EN 50288-6-2 & IEC 60332-1-2 ▲ 24AWGX4P CM(UL) E522879 ▲ RoHS COMPLIANCE

orange 2
white/orange

green 3
white/green

blue 1
white/blue

brown 4
white/brown

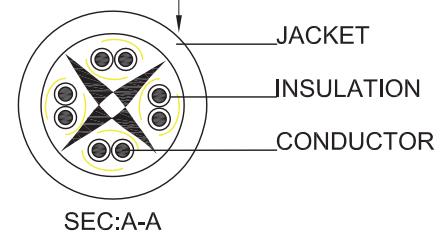

NOTE:
1.ELECTRICAL TEST:
<1> 100% OPEN SHORT & MISS WIRE TEST.
<2> FLUKE CHANNEL LEVEL 1DB↑
<3> CONDUCTOR RESISTANCE: L≤10M 10ΩMAX
10<L≤20M 15ΩMAX
20<L≤40M 25ΩMAX

	PINOUT		
PA/R	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor		24AWG (7/0.196±0.015mmBC)*4P
INSULATION		Diameter=1.03±0.05mm
Jacket	PVC	Thickness: Max AVG:0.50 Diameter=6.0±0.30mm

1	RJ45 PLUG	RJ45 PLUG: 8P8C 50U" GOLD PLATED TRANSPARENT PLUG;		
2	MOLDED	PVC MOLDED BOOT		
3	CABLE	CAT6 UTP[24AWG(7/0.196BC±0.015)]*4 OD:Ø6.0±0.2MM CM PVC JACKET.		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION :

Monoprice Cat6 Ethernet Patch Cable - FLEXboot, Snagless RJ45, Stranded, 550MHz, UTP, Pure Bare Copper, 24AWG

PID #:

DATE :

UNIT : ft/mm

FILE NAME:

