



Monoprice™
SlimRun™ 30AWG UTP Ethernet Patch Cable


Construction

Conductor	30AWG
Material:	BC
Nom. OD:	7/0.12±0.008mm
Insulation:	PE
Nominal Thickness:	0.21mm Min: 0.02mm
Nom. OD:	0.56±0.05mm
Jacket	PVC
Nominal Thickness:	0.35mm Min:
Nom. OD:	3.8±0.2mm

Electrical Characteristics

Conductor Resistance@20 °C ≤ 87.6 Ohms/km

	LOSS	NEXT	RL	ACR-N	ACR-F	PS NEXT	PS ACR-N	PS ACR-F
MHz	dB	dB	dB	dB	dB	dB	dB	dB
1	—	65	19.8	—	—	—	—	—
4	—	65	21.6	—	—	—	—	—
8	—	63.1	22.5	—	—	—	—	—
10	—	61.3	22.8	—	—	—	—	—
16	—	57.5	23.4	—	—	—	—	—
20	—	55.8	23.7	—	—	—	—	—
25	—	54.1	24	—	—	—	—	—
31.25	—	52.3	23	—	—	—	—	—
62.5	—	47.2	20	—	—	—	—	—
100	—	43.8	18	—	—	—	—	—
200	—	39	15	—	—	—	—	—
250	—	37.6	14	—	—	—	—	—

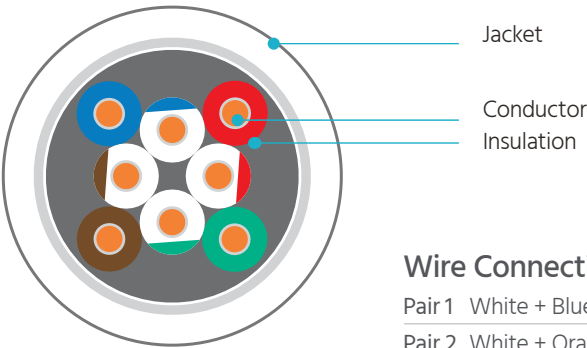

Mechanical Characteristics

Storage Temperature Range	0 °C to 45 °C
Installation Temperature Range	0 °C to 75 °C
Maximum Pulling Force	100 lbs.




Lengths: 0.5ft, 1ft, 3ft, 5ft, 7ft, 10ft, 14ft, 20ft, 25ft, 30ft and 50ft

SlimRun™ Cat6 Reinforced 30AWG UTP Ethernet Network Cable



0.149 inches diameter

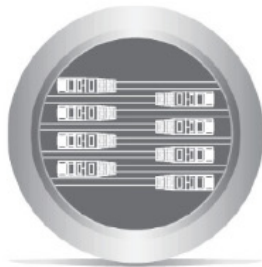

Reduces congestion in high density spaces



Ultimate protection



Lifetime warranty



Ratings/Certifications

UL, RoHS, REACH

Jacket Marking: E467139 PATCH CORD UTP CATEGORY 6 30AWG 4PAIRS ANSI/TIA/EIA 568B