



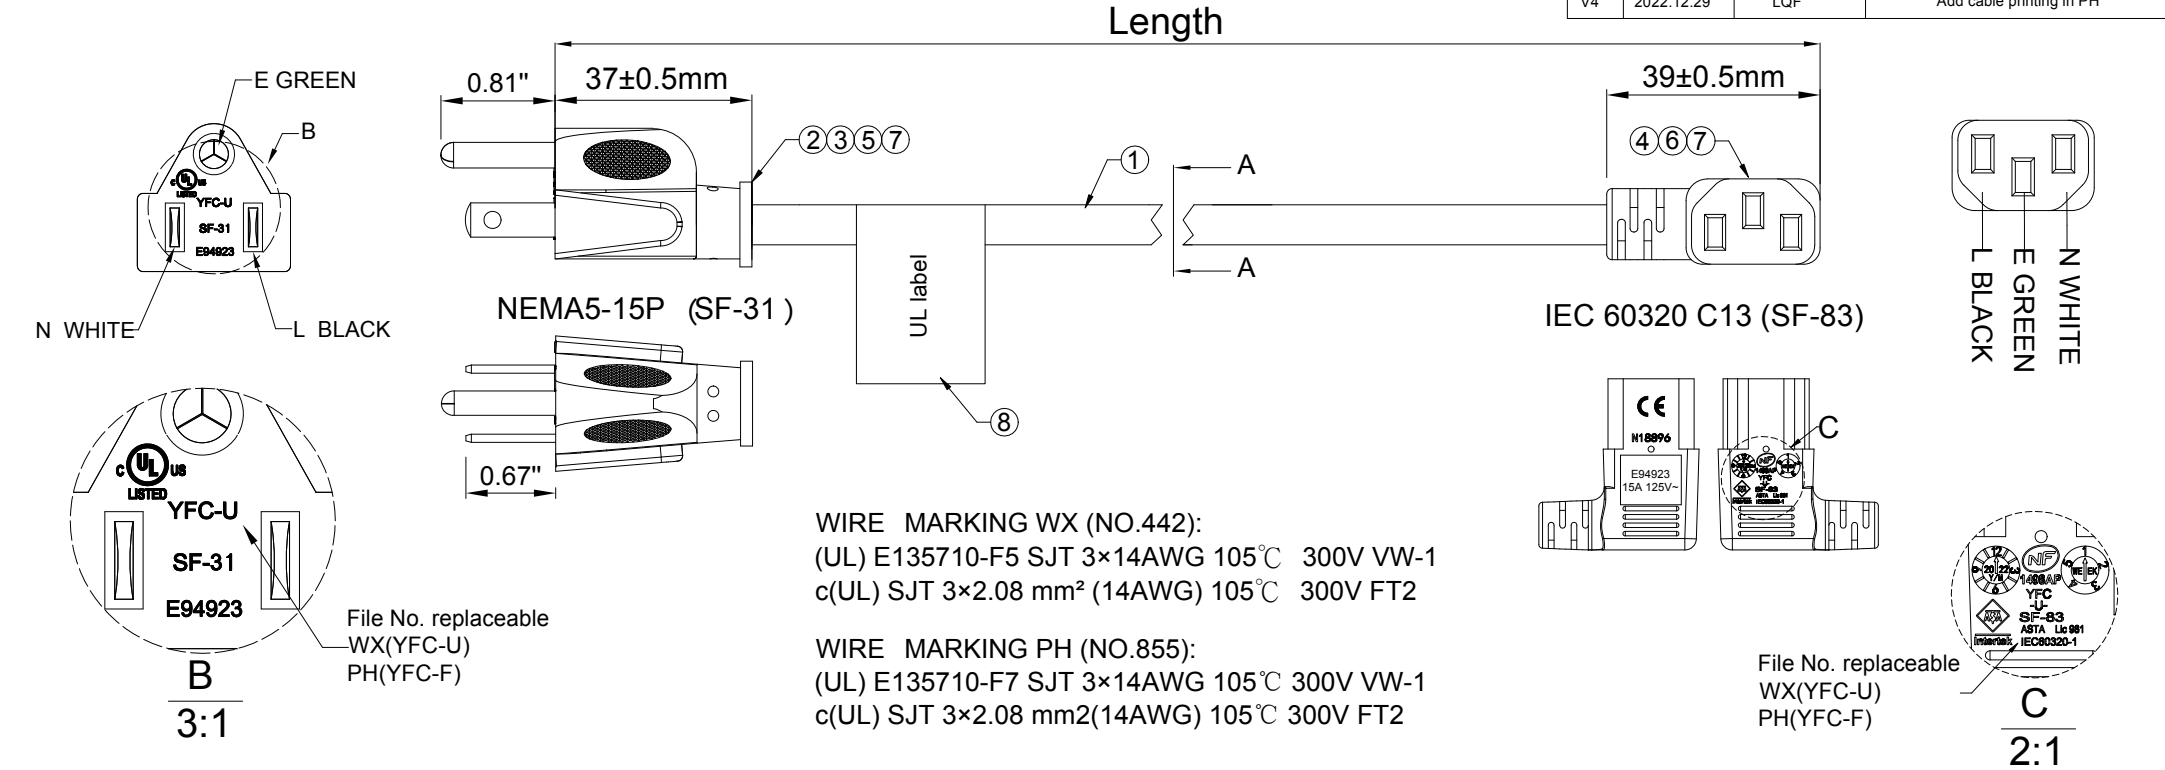

Polarity and Continuity Test	
Dielectric Voltage Withstand Test :1500V /1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor resistance	≤ 8.88Ω/1000m
Voltage Rating	AC 300V



PID	Color	Length (FT)
7683	Black	3±0.1
7684	Black	6±0.1
7685	Black	10±0.15
7686	Black	15±0.15

⑧	UL label	General Use Cord set	1	PC
⑦	Molding	PVC 40P	AR	G
⑥	Housing	Bracket IEC C13 Three Plug Black PBT UL94-V0	1	PC
⑤	Housing	Bracket 5-15P Three Plug Black PBT UL94-V0	1	PC
④	Terminal	C13Terminal Brass Natural color With 18-14AWG	3	PCS
③	Terminal	5-15P Non-Polar, Current Carrying End, With Riveting 18-14AWG Nickel Plating	2	PCS
②	Terminal	5-15P Terminal Nickel Plated 18-14AWG	1	PC
①	Cable	SJT 14AWGx3C 105°C Black	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

VENDOR CODE :
V16988

APPROVED BY PM & DATE :

PM PRINT NAME :

DESCRIPTION :
Monoprice Right Angle Power Cord - NEMA 5-15P to Right Angle IEC 60320 C13, 14AWG, 15A/1875W, SJT, 125V, Black

PID # :
7683.7684.7685.7686

DATE :
2022.12.29

UNIT :
MM

SHEET:
1 OF 4

FILE NAME:
PID_PRODUCT