

MONOLITH

MM-3 Powered Multimedia Speakers with Bluetooth®



P/N 35373, 35374

User's Manual

SAFETY WARNINGS AND GUIDELINES

Please read this entire manual before using this device, paying extra attention to these safety warnings and guidelines. Please keep this manual in a safe place for future reference.

- This device is intended for indoor use only.
- Do not expose this device to water or moisture of any kind. Do not place drinks or other containers with moisture on or near the device. If moisture does get in or on the device, immediately unplug it from the power source and allow it to fully dry before reapplying power.
- Do not touch the device, the power cord, or any other connected cables with wet hands.
- If operating this speaker in a humid environment, ensure that no condensation occurs. Condensation could cause damage to the speaker cone and could cause a short in the amplifier, which in turn could cause fire or severe electric shock.
- Do not expose this device to excessively high temperatures. Do not place it in, on, or near heat sources, such as a fireplace, stove, radiator, etc. Do not leave it in direct sunlight.
- Prior to operation, check the unit and power cord for physical damage. Do not use if physical damage has occurred.
- Before plugging the unit into a power outlet, ensure that the outlet provides the same type and level of power required by the device.
- Take care to prevent damage to the power cord. Do not allow it to become crimped, pinched, walked on, or become tangled with other cords. Ensure that the power cord does not present a tripping hazard.
- Never unplug the unit by pulling on the power cord. Always grasp the connector head or adapter body.
- Clean using a soft, dry cloth only. Do not use chemical cleaners, solvents, or detergents. For stubborn deposits, moisten the cloth with warm water.
- This device has no user serviceable parts. Do not attempt to open, service, or modify this device.

FEATURES

- 3" polypropylene cone woofer
- 3/4" silk dome tweeter
- 50Hz ~ 22kHz frequency response
- Dual class D amplifiers with 2x 15 watts to the woofers and 2x 8 watts to the tweeters
- Bluetooth® version 4.0 radio with the Qualcomm® aptX™ audio codec
- Stereo RCA, 3.5mm TRS, and Bluetooth inputs
- Includes a 3.5mm headphone output
- Includes a pair of wooden isolation/elevation stands

CUSTOMER SERVICE

The Monoprice Customer Service department is dedicated to ensuring that your ordering, purchasing, and delivery experience is second to none. If you have any problem with your order, please give us an opportunity to make it right. You can contact a Monoprice Customer Service representative through the Live Chat link on our website www.monoprice.com or via email at support@monoprice.com. Check the website for support times and links.


PACKAGE CONTENTS

Please take an inventory of the package contents to ensure you have all the items listed below. If anything is missing or damaged, please contact Monoprice Customer Service for a replacement.

1x Pair MM-3 powered speakers	1x AC power cord
2x Wooden isolation/elevation stands	1x Speaker connection cable
1x AC power adapter	1x User's manual


PRODUCT OVERVIEW

Front View

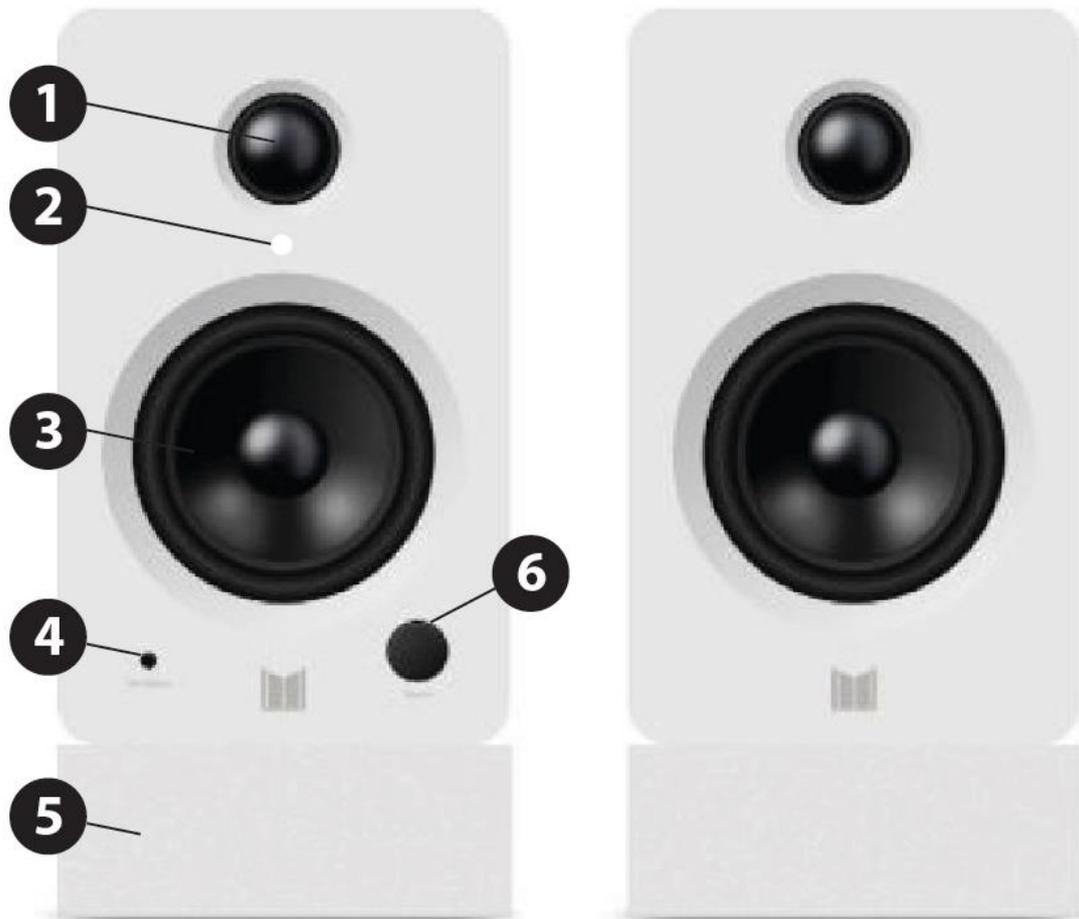

1. Tweeter
2. Power Indicator
3. Woofer
4. Headphone Output
5. Wooden Isolation/Elevation Stand
6. Volume Knob

Rear Panel

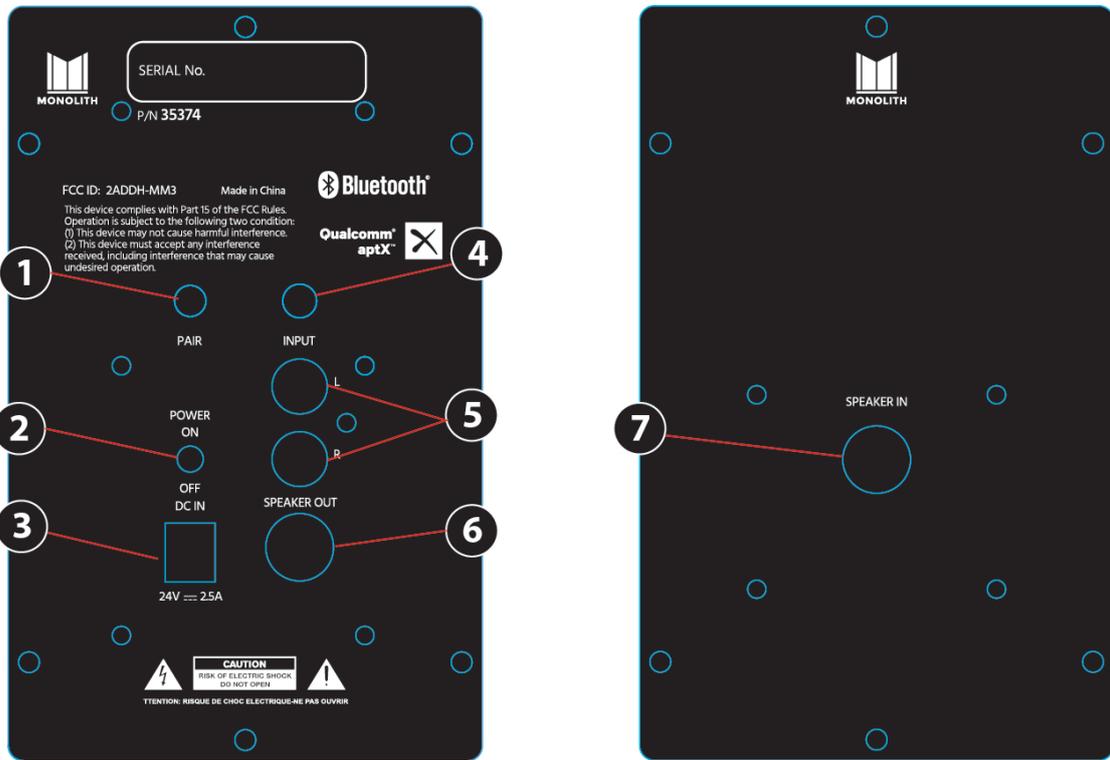

Master Speaker

1. Bluetooth® Pairing Button
2. Power Switch
3. DC Input Jack
4. 3.5mm TRS Input Jack
5. Stereo RCA Input Jacks
6. Speaker Output Connector

Slave Speaker

7. Speaker Input Connector

INSTALLATION

1. Ensure that the **Power Switch** on the rear panel of the **Master Speaker** is in the **OFF** position.
2. Rotate the **Volume Knob** on the **Master Speaker** fully counterclockwise.
3. Plug one end of the included **Speaker Connection Cable** into the **Speaker Input Connector** on the rear panel of the **Slave Speaker**, then plug the other end into the **Speaker Output Connector** on the rear panel of the **Master Speaker**.
4. (Optional) Using a 3.5mm stereo audio cable (not included), plug one end into the **3.5mm TRS Input Jack** on the rear panel of the **Master Speaker**, then plug the other end into the headphone output on your mobile device or other audio source device.
5. (Optional) Plug one end of a stereo RCA audio cable into the **Stereo RCA Input Jacks** on the rear panel of the **Master Speaker**, then plug the other end into the output jacks on your audio source device.
6. Plug the DC barrel connector on the included **AC Power Adapter** into the **DC Input Jack**.
7. Plug one end of the included **AC Power Cord** into the **AC Power Adapter**, then plug the other end into a nearby AC power outlet.

BLUETOOTH PAIRING

Perform the following steps to pair your mobile device with the speakers.

1. Press the **Power Switch** on the **Master Speaker** to the **ON** position.
2. Momentarily press and release the **Bluetooth® Pairing Button** on the **Master Speaker**. The **Power Indicator** on the front of the speaker will begin flashing, indicating that the speaker is in Bluetooth pairing mode.
3. Open the Bluetooth settings on your mobile device, then scan for nearby Bluetooth devices.
4. Locate and select the **MM-3** entry. If prompted for a passcode, enter **0000** (four zeros). The **Power Indicator** on the front panel will cease flashing, indicating that the Bluetooth connection has been successfully made.

*Note that once paired with your mobile device, the speakers will remember the pairing. To reconnect after the connection has been broken, open the Bluetooth settings on your mobile device and select **Connect** to re-establish the connection.*

OPERATION

Note that the output of the speakers is the sum of all inputs. Unless you specifically want to listen to a mix of different sources, only one audio input should be in active use at a time.

1. Rotate the **Volume Knob** on the **Master Speaker** fully counterclockwise.
2. Press the **Power Switch** on the **Master Speaker** to the **ON** position. The **Power Indicator** on the front panel will illuminate.
3. Start audio playback on your audio source device.
4. Slowly rotate the **Volume Knob** clockwise until the volume is at a comfortable listening level

TECHNICAL SUPPORT

Monoprice is pleased to provide free, live, online technical support to assist you with any questions you may have about installation, setup, troubleshooting, or product recommendations. If you ever need assistance with your new product, please come online to talk to one of our friendly and knowledgeable Tech Support Associates. Technical support is available through the online chat button on our website www.monoprice.com or through email by sending a message to tech@monoprice.com. Check the website for support times and links.

SPECIFICATIONS

Model	35373 (white) and 35374 (black)
Woofer Driver	3" polypropylene cone
Tweeter Driver	3/4" silk dome
Amplifier Type	Class D
Woofer Amplifier Power	2x 15 watts
Tweeter Amplifier Power	2x 8 watts
Inputs	1x 3.5mm TRS, 1x stereo RCA, 1x Bluetooth
Output	1x 3.5mm TRS headphone
Bluetooth® Version	4.0
Audio Codec	Qualcomm® aptX™
Digital Signal Processor	SigmaDSP®
Input Power	24 VDC, 2.5A
AC Adapter Input Power	100 ~ 240 VAC, 50/60 Hz
Dimensions (each)	4.3" x 7.1" x 5.7" (110 x 180 x 145 mm)

REGULATORY COMPLIANCE

Notice for FCC



This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Modifying the equipment without Monoprice's authorization may result in the equipment no longer complying with FCC requirements for Class A digital devices. In that event, your right to use the equipment may be limited by FCC regulations, and you

may be required to correct any interference to radio or television communications at your own expense.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

Radio Notice for FCC

Caution

This FCC Part 15 radio device operates on a non-interference basis with other devices operating at this frequency. Any changes or modification to said product not expressly approved by Monoprice, including the use of non-approved antennas, could void the user's authority to operate this device.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice for Industry Canada

This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

Radio Notice for Industry Canada

Caution

This IC RSS-210 radio device operates on a non-interference basis with other devices operating at this frequency. Any changes or modification to said product not expressly approved by Monoprice, including the use of non-approved antennas, could void the user's authority to operate this device.

This device complies with IC RSS-210. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Bluetooth® word mark and logos are registered trademarks of Bluetooth SIG, Inc.

Qualcomm® is a trademark of Qualcomm Incorporated, registered in the United States and other countries. aptX™ is a trademark of Qualcomm Technologies International, Ltd., registered in the United States and other countries. Qualcomm® aptX™ is a product of Qualcomm Technologies International, Ltd.

SigmaDSP® is a registered trademark of Analog Devices, Inc.