

BLACKBIRD™



Blackbird™ by Monoprice™
4K 4×4 HDMI® MATRIX

P/N **43623**
User Manual

SAFETY WARNINGS AND GUIDELINES

Please read this entire manual before using the Blackbird™ 4K 4×4 HDMI® Matrix, paying extra attention to these safety warnings and guidelines. Please keep this manual in a safe place for future reference.

- This device is intended for indoor use only.
- Do not expose this device to water or moisture. Do not place drinks or other containers with moisture on or near the unit. If moisture does get in or on the unit, immediately unplug it from the power source and allow it to fully dry before reapplying power.
- Do not touch this device, the power cord, or any other connected cables with wet hands.
- Do not expose this device to excessive vibration, extreme force, shock, or fluctuations in temperature or humidity.
- Do not expose the unit to excessively high temperatures. Do not place it in, on, or near heat sources, like a fireplace, stove, radiator, etc. Do not leave it in direct sunlight.
- Do not place or install the unit in an area where it can be exposed to excessive amounts of dust, humidity, oil, smoke, or explosive vapors.
- Before operation, check the unit and power cord for physical damage. Do not use if physical damage has occurred.
- Before plugging the unit into a power outlet, ensure that the outlet provides the same type and level of power required by the device.
- Unplug this transceiver from the power source when not in use.
- Take care to prevent damage to the power cord. Do not allow it to become crimped, pinched, walked on, or become tangled with other cords. Ensure that the power cord does not present a tripping hazard.
- Never unplug this device by pulling on the power cord. Always grasp the connector head or adapter body.
- Ensure power is turned off and disconnected before making any electrical connections.
- Do not use chemical cleaners or solvents to clean these mounts. Use only a soft cloth that's slightly moistened with warm water.
- This device has no user-serviceable parts. Do not attempt to open, service, or modify it.

Remote Control (Model): YKQ-111

⚠ WARNING	
• INGESTION HAZARD: This product contains a button cell or coin battery • DEATH or serious injury can occur if ingested. • A swallowed button cell or coin battery can cause Internal Chemical Burns in as little as 2 hours. • KEEP new and used batteries OUT OF REACH of CHILDREN • Seek immediate medical attention if a battery is suspected to be swallowed or inserted inside any part of the body.	

- Remove and immediately recycle or dispose of used batteries according to local regulations and keep them away from children. Do NOT dispose of batteries in household trash or incinerate them.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.
- Identification of compatible battery type: CR2025
- Nominal battery voltage: 3V
- Non-rechargeable batteries are not to be recharged.
- Do not force discharge, recharge, disassemble, heat above (manufacturer's specified temperature rating), or incinerate. Doing so may result in injury due to venting, leakage, or explosion resulting in chemical burns.
- Ensure the batteries are installed correctly according to polarity (+ and -).
- Do not mix old and new batteries, different brands, or types of batteries, such as alkaline, carbon-zinc, or rechargeable batteries.
- Remove and immediately recycle or dispose of batteries from equipment not used for an extended period according to local regulations.
- Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep them away from children.

TABLE OF CONTENTS

SAFETY WARNINGS AND GUIDELINES	2
INTRODUCTION	4
FEATURES.....	4
PACKAGE CONTENTS.....	5
PRODUCT OVERVIEW	5
CONNECTION DIAGRAM	6
EDID SETTINGS.....	7
TECHNICAL SPECIFICATIONS	8
CUSTOMER SERVICE.....	8
TECHNICAL SUPPORT	9
REGULATORY COMPLIANCE	9
NOTICE FOR FCC.....	9
NOTICE FOR ISED CANADA.....	10
DISPOSAL AND RECYCLING INFORMATION	10

INTRODUCTION

This Blackbird™ 4K 4×4 HDMI® Matrix can distribute any of up to four HDMI video sources to any of up to four HDMI displays. It supports video resolutions up to 4K @ 60 Hz with the YCbCr 4:4:4 color space. It supports multichannel audio, including 7.1-channel LPCM, Dolby TrueHD™, and DTS-HD Master Audio™. It can independently downscale each output from 4K to 1080p. It features a 4-position DIP switch on the rear panel for setting the EDID® for the source devices.

FEATURES

- Independently distributes any of up to four HDMI® video sources to up to four HDMI displays Supports up to 18Gbps video bandwidth
- Supports video resolutions up to 4K @ 60 Hz with YCbCr 4:4:4 color space, including 4K @ 30 Hz and 1080p @ 60 Hz
- Complies with the HDMI 2.0 and HDCP™ 2.2/1.x standards

- Delivers up to 18 Gbps video bandwidth
- Supports EDID® management using a 4-position DIP switch
- Supports independent 4K to 1080p downscaling for greater flexibility when using 1080p displays
- Supports HDR, HDR10, HDR10+, and Dolby Vision™ passthrough
- Supports multichannel audio, including LPCM 7.1, Dolby TrueHD™, DTS-HD Master Audio™, Dolby® 5.1, and DTS® 5.1
- Includes a multifunction IR remote control

PACKAGE CONTENTS


Take an inventory of the package contents to make sure you have all the items listed below.

Please contact Monoprice Customer Service for a replacement if anything is missing or damaged.

- **1x** 4K 4x4 HDMI® Matrix
- **1x** AC Power Adapter (12 VDC, 2.5A)
- **1x** IR Remote Control
- **2x** Rackmount Ears
- **4x** Rackmount Screws
- **1x** User Manual

PRODUCT OVERVIEW


A. FRONT PANEL

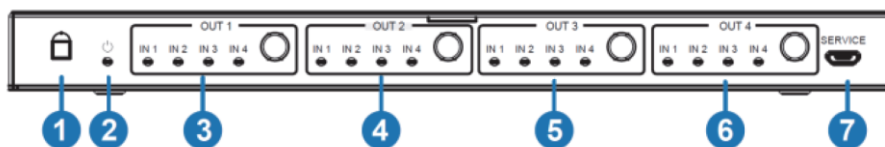

1	IR	IR "eye" for receiving signals from the included IR Remote Control.
2	POWER	The LED illuminates red when power is applied.
3	OUT 1	This section includes a button and four LEDs. Momentarily press the button to cycle forward through the available inputs. One of the LEDs will illuminate to indicate the selected input. Press and hold the button for about 3 seconds to enable or disable the 4K to 1080p Downscaler for OUT 1 . The Downscaler is disabled by default.
4	OUT 2	The functionality of the OUT 2 section is identical to that of the OUT 1 section.
5	OUT 3	The functionality of the OUT 3 section is identical to that of the OUT 1 section.

6	OUT 4	The functionality of the OUT 4 section is identical to that of the OUT 1 section.
7	SERVICE	Micro USB port for performing a firmware update, if one is available.


B. REAR PANEL

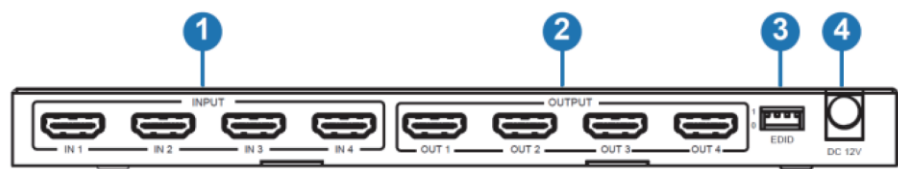

1	INPUT	Four HDMI® ports for connecting up to four HDMI video source devices.
2	OUTPUT	Four HDMI® ports for connecting up to four HDMI displays.
3	EDID	Four DIP switches for setting the EDID® used by the source devices.
4	DC 12V	DC barrel connector for connecting the included AC Power Adapter.


C. IR REMOTE CONTROL

1	POWER	Press the button to turn the matrix on or to put it into standby mode.
2	1 2 3 4	Press one of the four numbered buttons to directly select that input for Output1.
3	◀ / ▶	Press the ◀ button to cycle backward through the available inputs. Press the ▶ button to cycle forward through the available inputs.
4	SD	Press the button to enable or disable the 4K to 1080p Downscaler for Output 1 . The Downscaler is disabled by default.

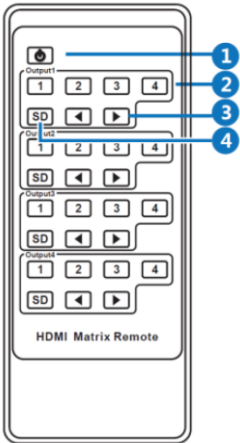

The functionalities of the buttons in the **Output 2**, **Output 3**, and **Output 4** sections are identical to those in the **Output1** section.

CONNECTION DIAGRAM

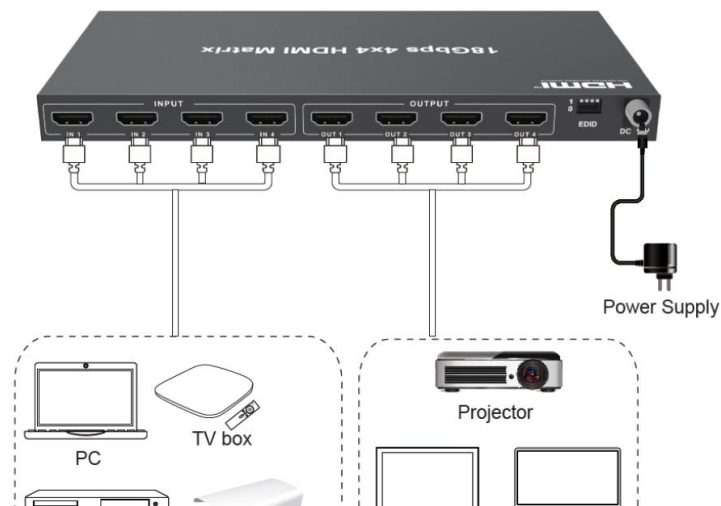

EDID SETTINGS

Use the information in the following table to determine the DIP switch settings for the desired EDID®. You should choose an EDID in which all the settings are supported by all the displays. Note that when setting the DIP switches, the switch is on (1) when it is up and off (0) when it is down.

DIP Switches	Video/Audio Settings
0000	1080p, Stereo Audio 2.0
0001	1080p, Dolby® / DTS® 5.1
0010	1080p, HD Audio 7.1
0011	4K @ 30 Hz, Stereo Audio 2.0
0100	4K @ 30 Hz, Dolby® / DTS® 5.1
0101	4K @ 30 Hz, HD Audio 7.1
0110	4K @ 60 Hz, Stereo Audio 2.0 SDR*
0111	4K @ 60 Hz, Dolby® / DTS® 5.1 SDR
1000	4K @ 60 Hz, HD Audio 7.1 SDR
1001	4K @ 60 Hz, Stereo Audio 2.0 HDR**
1010	4K @ 60 Hz, Dolby® / DTS® 5.1 HDR
1011	4K @ 60 Hz, HD Audio 7.1 HDR
1100	Copy Output 1
DIP Switches	Video/Audio Settings
1101	Copy Output 2
1110	Copy Output 3
1111	Copy Output 4

*SDR = Standard Dynamic Range

**HDR = High Dynamic Range

TECHNICAL SPECIFICATIONS

P/N	43623
Inputs	4x HDMI®
Outputs	4x HDMI
HDMI Version	2.0
HDCP™ Version	2.2/1.x
Maximum Video Resolution	4K@60Hz
Video Bandwidth	18Gbps
Supported Color Spaces	RGB, YCbCr 4:4:4/4:2:2/4:2:0
Supported Color Depths	1080p@60Hz: 8-bit, 10-bit, 12-bit 4K@60Hz YCbCr 4:4:4: 8-bit 4K@60Hz YCbCr 4:2:2/4:2:0: 8-bit, 10-bit, 12-bit
Supported HDMI Audio Formats	LPCM 7.1, Dolby TrueHD™, DTS-HD Master Audio™, Dolby® 5.1, DTS® 5.1
High Dynamic Range (HDR) Support	HDR, HDR10, HDR10+, Dolby Vision™
Input Power	12 VDC, 2.5A
AC Adapter Input Power	100 ~ 240 VAC, 50/60 Hz
Maximum Power Consumption	11.04W
Operating Temperature	+32 ~ +104°F (0 ~ +40°C)
Storage Temperature	-4 ~ +140°F (-20 ~ +60°C)
Operating Humidity	20 ~ 90% RH, non-condensing
Dimensions	8.7" × 8.1" × 0.7" (220 mm × 205 mm × 19 mm)
Weight	18.9 oz. (535 g)

CUSTOMER SERVICE

The Monoprice Customer Service department is dedicated to ensuring that your ordering, purchasing, and delivery experience is second to none. If you have any problems with your order, please allow us to make it right. You can contact a Monoprice Customer Service

representative through the Live Chat link on our website **www.monoprice.com** or via email at **support@monoprice.com**. Check the website for support times and links.

TECHNICAL SUPPORT

Monoprice™ is pleased to provide free, live, online technical support to assist you with any questions you may have about installation, setup, troubleshooting, or product recommendations. If you ever need assistance with your new product, please come online to talk to one of our friendly and knowledgeable Tech Support Associates. Technical support is available through the online chat button on our website **www.monoprice.com** or through email by sending a message to **tech@monoprice.com**. Check the website for support times and links.

To download the latest drivers, firmware, manuals, etc., go to **www.monoprice.com** and type **43623** into the search bar. If available, support files are linked at the bottom of the product page.

REGULATORY COMPLIANCE

NOTICE FOR FCC

 This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Modifying the equipment without Monoprice's authorization may result in the equipment no longer complying with FCC requirements for Class B digital devices. In that event, your right to use the equipment may be limited by FCC regulations, and you may be required to correct any interference to radio or television communications at your own expense.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTICE FOR ISED CANADA

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

DISPOSAL AND RECYCLING INFORMATION



The symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electrical and electronic products via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your unwanted product, please contact your local authorities, waste disposal service, or the shop where you purchased the product.

Monoprice™, Blackbird™, the Blackbird logo, and all Monoprice logos are trademarks of Monoprice Inc.

HDMI®, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Dolby®, Dolby® TrueHD™, Dolby Vision™, Dolby Audio™, and the double-D symbol are trademarks of Dolby Laboratories.

DTS®, the Symbol, and DTS and the Symbol together are registered trademarks of DTS, Inc. DTS-HD™ and DTS-HD Master Audio™ are trademarks of DTS, Inc.

EDID® is a registered trademark of the Video Electronics Standards Association.

HDCP™ is a trademark of Digital Content Protection LLC.



TECHNOLOGY AT PRICES THAT MAKE SENSE

www.monoprice.com

Need Help? We're here for you!

Contact us: **www.monoprice.com/contactus**

Product pictures are for reference only.

Specifications described herein are subject to change without prior notification.

Monoprice™ and all Monoprice logos are trademarks of Monoprice Inc.

Copyright © 2024 Monoprice, Inc. All rights reserved.

Monoprice, Inc.

1 Pointe Drive, Suite 400

Brea, CA 92821 - USA

www.monoprice.com