


RoHS COMPLIANT	REVISION INFORMATION		
	Rev.	Rev. Date	Brief Description

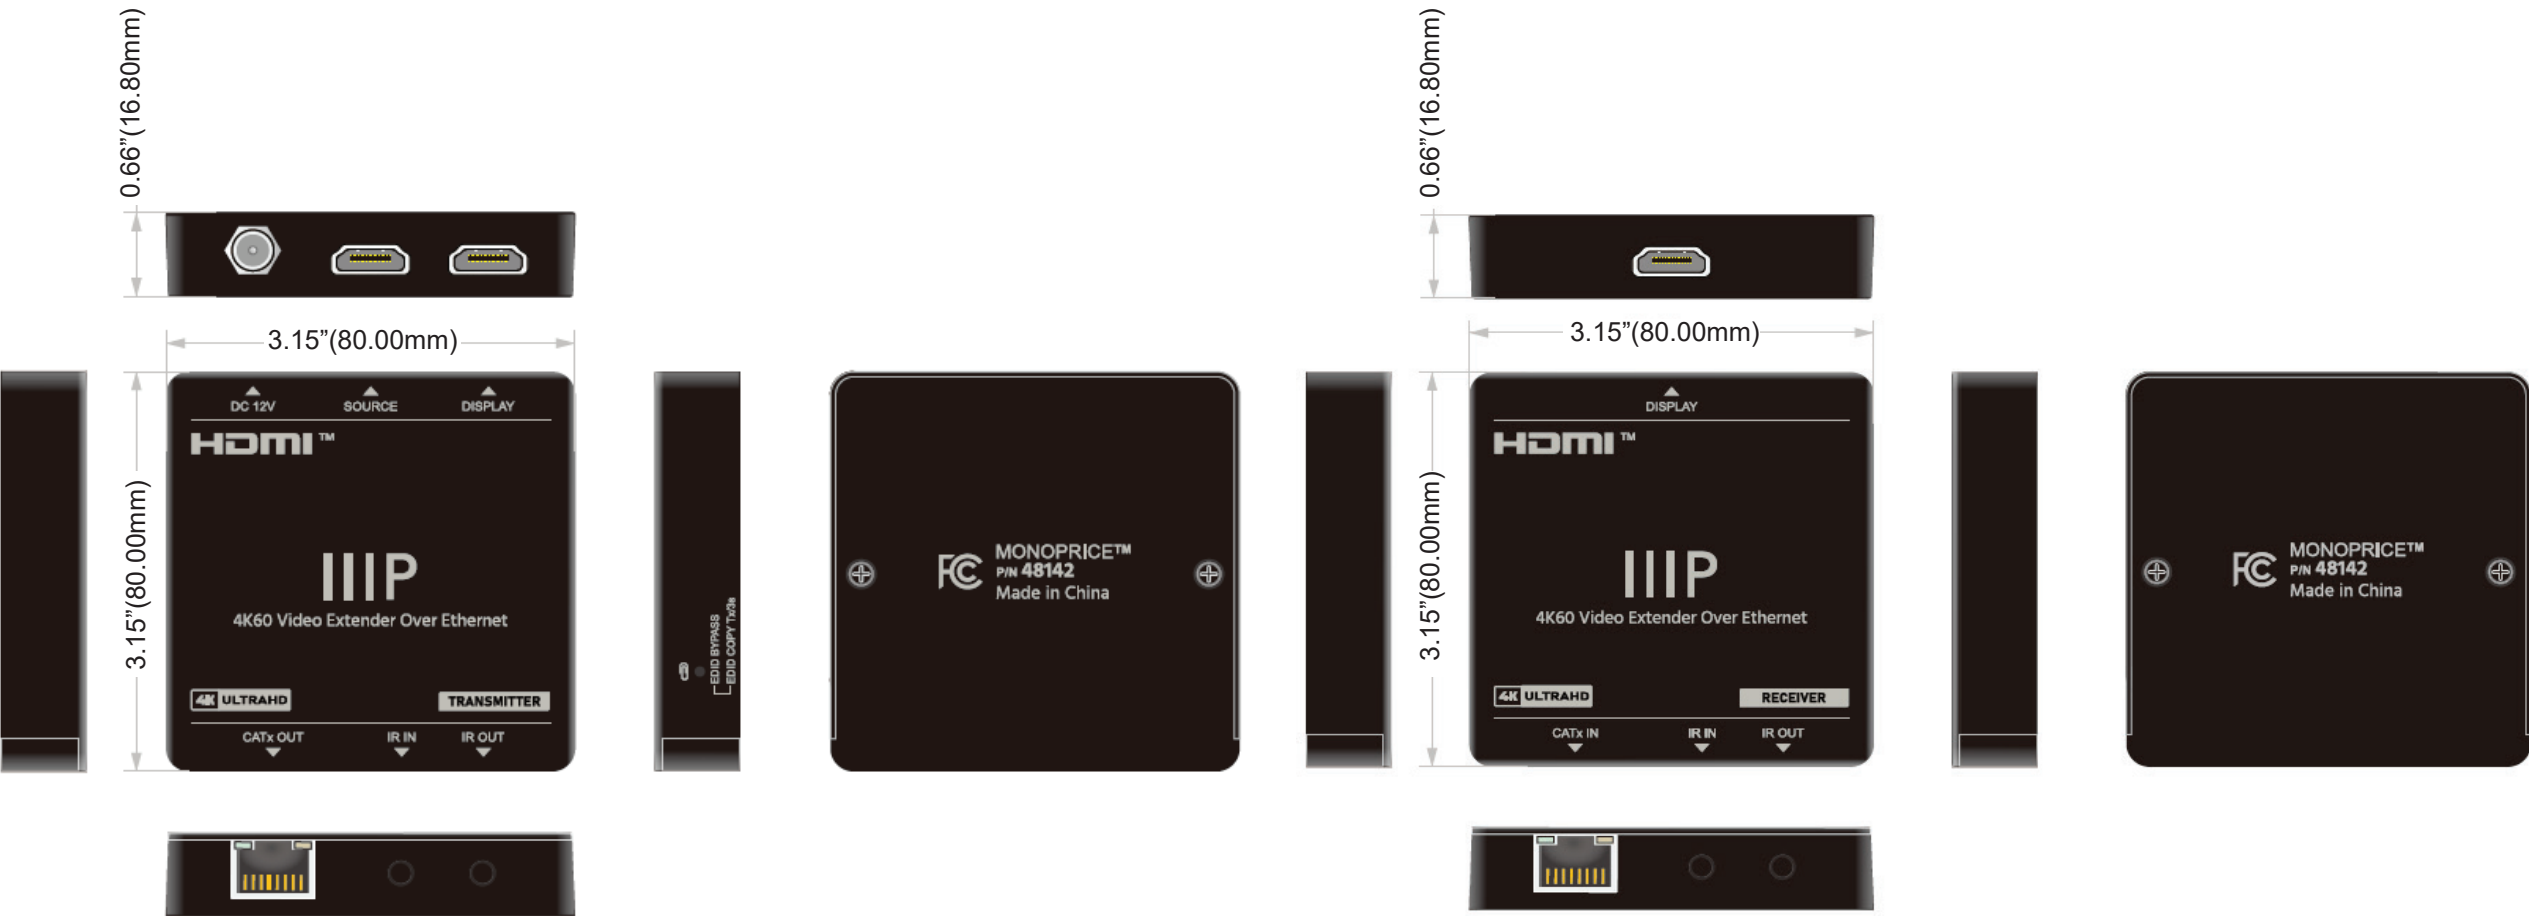

SPECIFICATIONS

Transmitter	
Input	1x SOURCE
Input Connector	1x HDMI Port
Output	1x DISPLAY, 1x CATx OUT
Output Connector	1x HDMI Port, 1x RJ45
Control	1x IR IN, 1x IR OUT
Control Connector	2x 3.5 mm Mini Jacks
Receiver	
Input	1x CATx IN
Input Connector	1x RJ45
Output	1x DISPLAY
Output Connector	1x HDMI Port
Control	1x IR IN, 1x IR OUT
Control Connector	2x 3.5 mm Mini Jacks
General	
Video Resolution	Up to 4K @ 60Hz 4:4:4, HDR10
HDMI Audio Format	Supports LPCM 2ch, LPCM 5.1ch, LPCM 7.1ch, Dolby Digital® 2ch, Dolby Digital 5.1ch, DTS® 2ch, DTS 5.1ch, DTS-96/24® 5.1ch
Transmission Distance	4K / 1080p ≈ 70 meters (230 feet) Note: CATx cable length should not be less than 15 meters for best video output.
HDMI Version	HDMI 2.0
HDCP Version	HDCP 2.2 Note: The HDCP of output follows the HDCP version of display device.
EDID	EDID Management
Power Supply	Input: 100–240 VAC, 50/60 Hz Output: 12 VDC, 1 A
Power Consumption	4 W (Max)
Operating Temperature	23 °F – 131 °F / -5 °C – 55 °C
Storage Temperature	-13 °F – 158 °F / -25 °C – 70 °C
Relative Humidity	10–90%
Dimensions (W x H x D)	3.1" x 0.7" x 3.1" (80 x 16.8 x 80 mm)
Net Weight	Tx/Rx: 2.5 oz (70 g)

7	Used Manual	User Manual of PID 48142	1	PCS
6	Power Adaptor	Power Adaptor (12 VDC, 1 A)	1	PCS
5	Strip	Velcro Strips	2	PCS
4	IR	IR Emitter	1	PCS
3	IR	IR Receiver	1	PCS
2	RX	4K Video Receiver	1	PCS
1	TX	4K Video Transmitter	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION :
Monoprice™ 4K60 Video Extender with HDMI® up to 70m Over a Single CAT6/6a Ethernet Cable

PID # :
48142

DATE :	UNIT : MM / IN / FT	FILE NAME:
--------	------------------------	------------