



1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME	Monoprice					DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.						2017.04.25	A/0	NEW	LJW

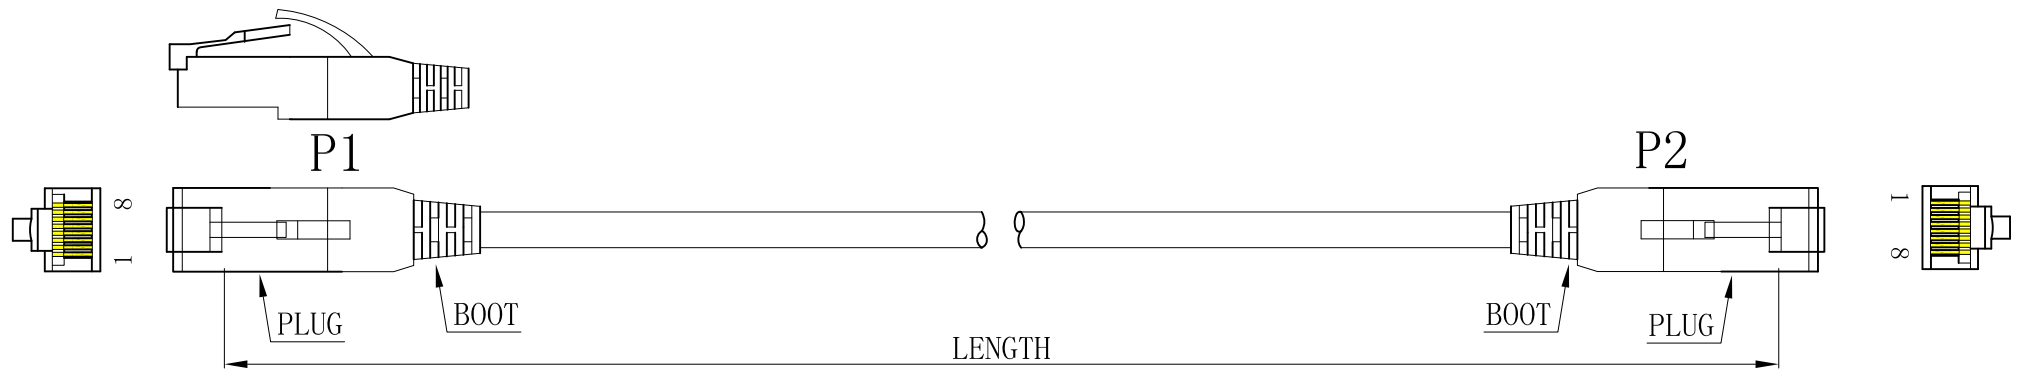

MARKING: YFC Monoprice CAT.6A UTP PATCH CONFORMS TO ANSI/TIA-568-C.2 & ISO/IEC 11801 30AWGX4P
 WWW.MONOPRICE.COM

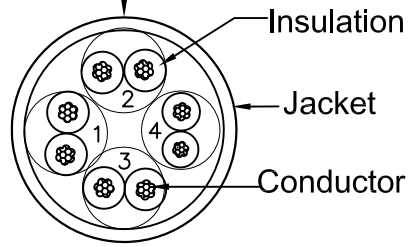

Conductor	Bare Copper 30AWG
Insulation	Thickness:MIN at any point:0.11mm MAX AVG:0.13mm Diameter:0.48±0.05mm
Jacket	PVC Thickness:MIN at any point:0.30mm MAX AVG:0.42mm Diameter:3.1±0.1MM
Wire	CAT.6A SLIM UTP 30AWGX4P
Plug	Assemble+boot 8P8C50U"
Colour	BK021
Length	0.305M±15mm

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1	↔	1	WHT/ORG
2	↔	2	ORG
3	↔	3	WHT/GRN
6	↔	6	GRN
4	↔	4	BLU
5	↔	5	WHT/BLU
7	↔	7	WHT/BRN
8	↔	8	BRN

MONOPRICE

Part No.			
Description	CAT.6A SLIM UTP (40 Cross) STR 30AWGX4P PVC		
UNIT	mm	APPROVAL	CHECKER
PAGE	1/1	2017.04.25	LJW

鍾曙光