



1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME	Monoprice					DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.						2017.04.19	A/0	NEW	LJW

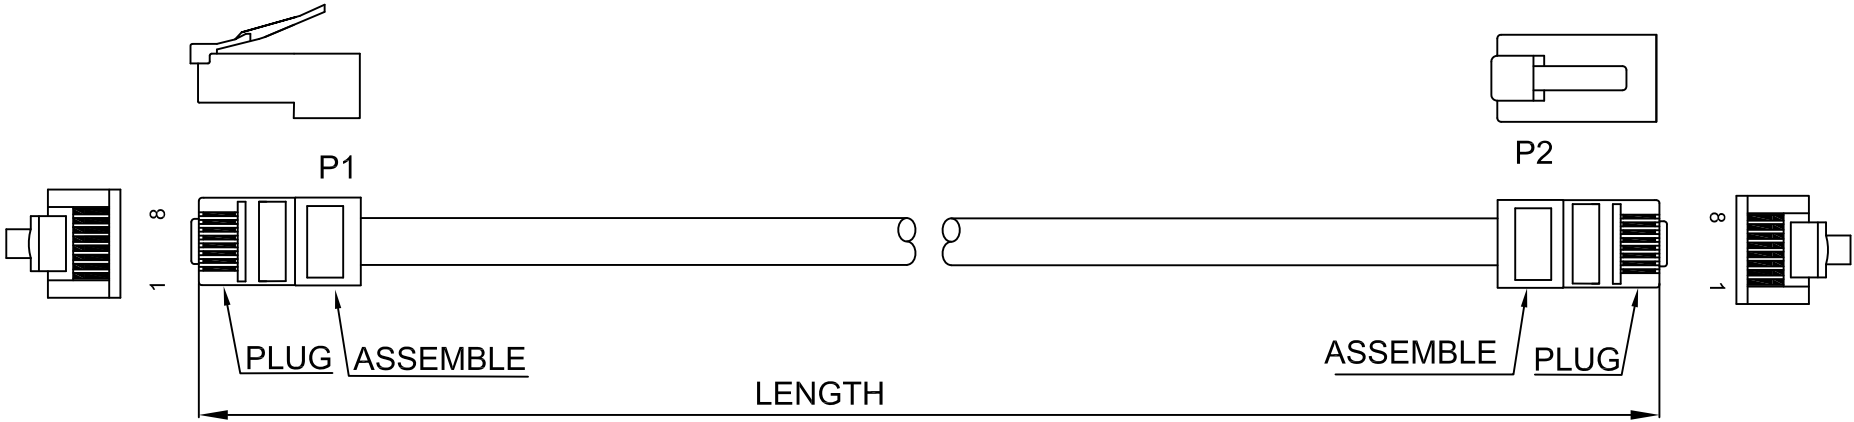

Marking: YFC Monoprice CAT.5E UTP 350Mhz ETL Verified ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-3-2 & IEC 60332-1-2 ▲ 24AWGX4P CMX(UL) E164469-XX RoHS COMPLIANCE V10277 WWW.MONOPRICE.COM

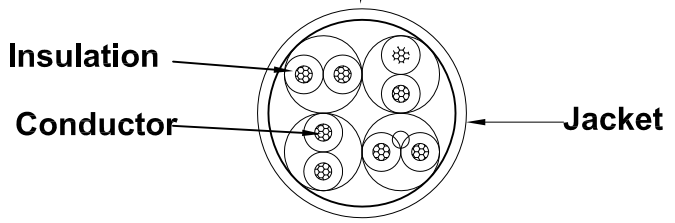

Conductor		Bare Copper 24AWG
Insulation		Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.94±0.06mm
Jacket	PVC	Thickness:MIN at any point:0.42mm MAX AVG:0.48mm Diameter:5.4±0.20mm
Wire	CAT.5E UTP STR 24AWG*4P	
Plug	8P8C 50U"	
Length	0.15M±15mm	
Color	BK012	

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1	↔	1	WHT/ORG
2	↔	2	ORG
3	↔	3	WHT/GRN
6	↔	6	GRN
4	↔	4	BLU
5	↔	5	WHT/BLU
7	↔	7	WHT/BRN
8	↔	8	BRN

MONOPRICE

Part No.			
Description	CAT 5E UTP 24AWG PVC Assemble		
UNIT	mm	CHECKER	DRAWER
PAGE	1/1		
Draw.No.			LJW

Approval stamp: 2017.04.20, 鍾曙光