



RoHS COMPLIANT	VERSION INFORMATION (Vender)			
	Rev.	Rev. Date	Modified By	Brief Description
	V1			Initial Issue
	V2			

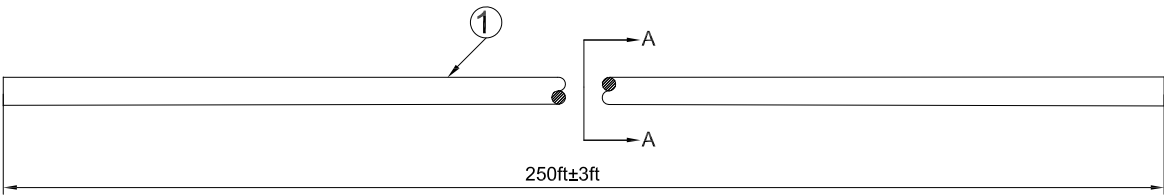

MARING:(UL).E164469-B2 22AWGX4P CAT8 SSTP RoHS COMPLIANCE 0002FT 0004FT 0006FT.....250FT

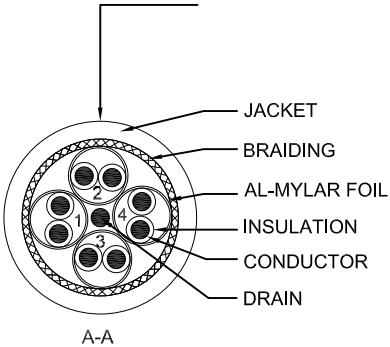

1.Physical Characteristic

- ◆Temperature Rating: 75℃
- ◆Voltage rating: 300V AC
- ◆Elongation at conductors: ≥10%
- ◆Elongation at insulation: ≥300%
- ◆Tensile strength of insulation: ≥16.5MPa
- ◆Elongation at jacket: ≥100%
- ◆Tensile strength of jacket: ≥10.3MPa

2.Electrical Characteristics

- ◆Conductor DC resistance: 73.2Ω/KM @ 20℃
- ◆DC Resistance Unbalance: ≤5%
- ◆Insulation resistance: ≥500MΩ/100m
- ◆Dielectric Test: 500V DC/1min; No Breakdown

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

Conductor		22AWG (1/0.62±0.008mmBC)*4P
INSULATION		Diameter=1.55±0.05mm
Jacket	PVC	Thickness: Max AVG:0.60 Diameter=8.0±0.20mm

①	CABLE	CAT8 SSTP 4P[22AWG(1/0.62±0.008MM BC)+AL/MY]+BRAID(AL-MG16*8/0.12) OD=8.0±0.20mm PVC JACKET		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

MONOPRICE				
VENDOR CODE : V16895		DESCRIPTION : SSTP Cat8 22AWG Solid bulk cable		
APPROVED BY PM & DATE :				
PM PRINT NAME :		PID # : 42957-42959		
DATE : 2020/03/26	UNIT : MM	SHEET: 1 OF 2	FILE NAME: PID_PRODUCT	