


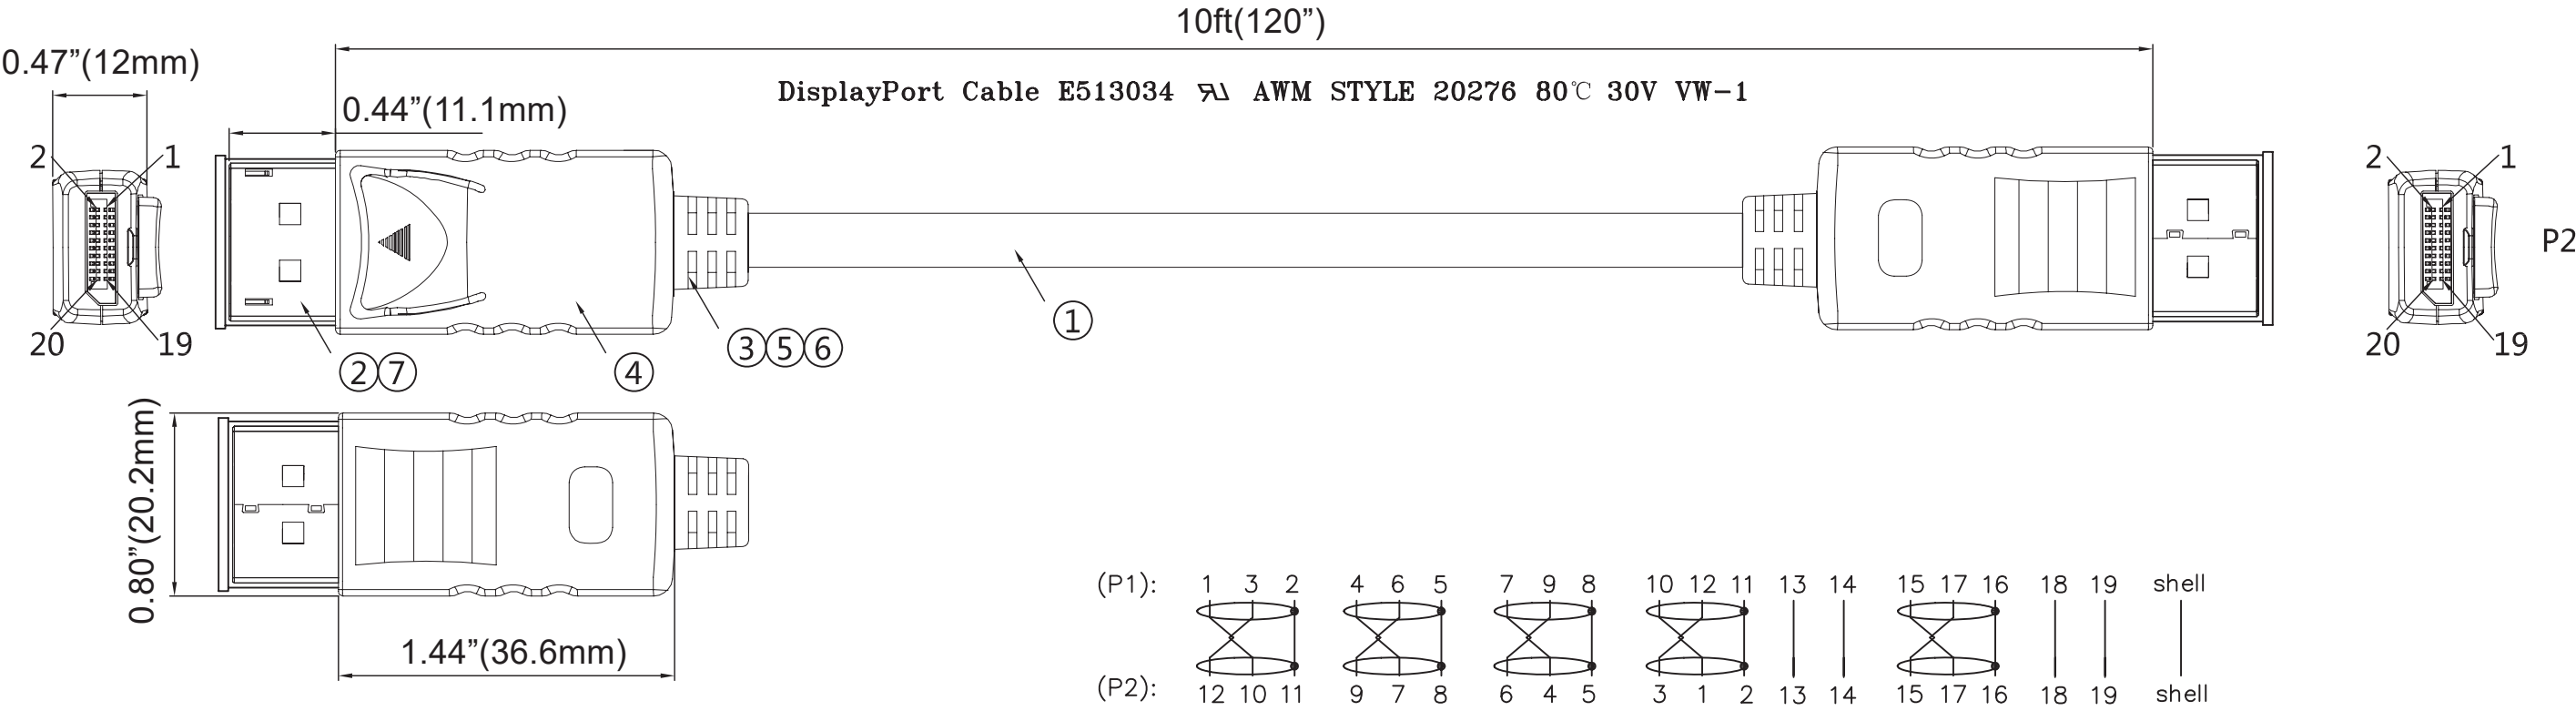

- NOTES:
- Test Condition:
 - 100% OPEN & SHORT TEST;
 - Insulation Resistance: DC300V 5MΩ(Min) ;
 - Conductor Resistance: 5Ω/Max.
 - Hi-Pot:DC 300V/0.1s.
 - The product is ROHS compliant.
 - HDTV-DVD TEST:4K@60HZ (Direct plug in device)
 - Prop 65

7	Dust cap	DP Male transparent dust cover	2	PCS
6	SR	PVC 45P Black		
5	INNER MOLD	PE		
4	Shell	DP 20P Male Black ABS shell, without LOGO	2	PCS
3	Wire Clip	DP black wire clip (for 32# wire)	2	PCS
2	CON	DP 20PIN Male connector, Gold-plated wire type terminals in iron case gold-plated 1U"	2	PCS
1	CABLE	UL20276[(32AWG*1P+D+AL/MYLAR)*5P+32AWG*4C+AL+D+B(16*7/0.12AL)+ OD 5.2±0.15mm outer cover: black PVC semi-foggy surface	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

MONOPRICE

DESCRIPTION :
Monoprice™ Select Series DisplayPort 1.2 Cable, 10ft

PID # : 13361

DATE :UNIT : MM / IN / FTFILE NAME: