



Rev.	Rev. Date	Brief Description

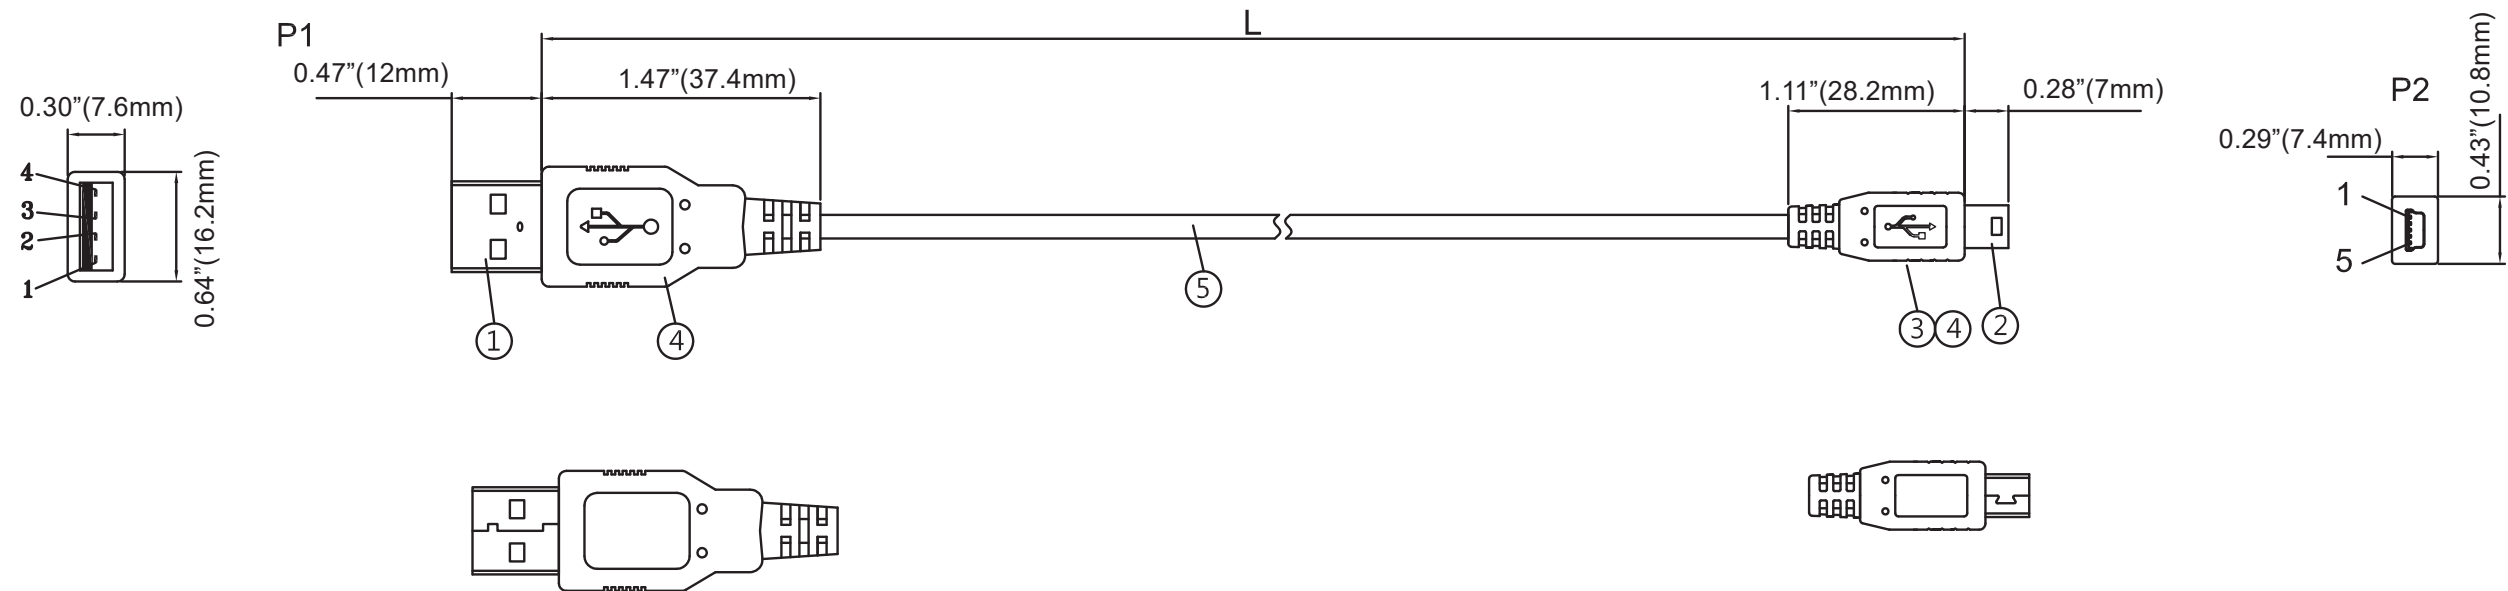

USB A/M MOLDING TYPE

MINI USB 5P MOLDING TYPE

PIN OUT

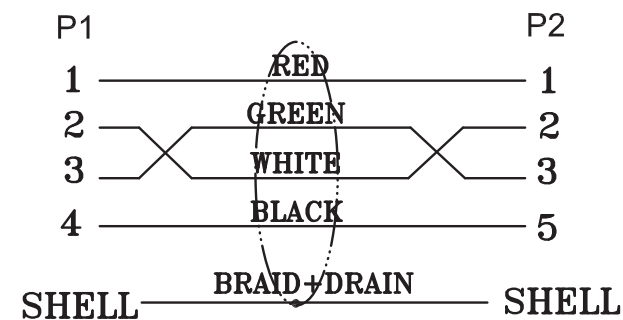

CABLE ELECTRICAL TEST:

<1>.100% OPEN SHORT & MISS WIRE TEST.
<2>.INSULATION RESISTANCE: DC300V 10Mohm MIN
<3>.CONDUCTER RESISTANCE:3 ohm MAX.

PID	L(ft)	L(in)
3896	3ft	36"
107	6ft	72"
3897	10ft	120"
3898	15ft	180"

5.	CABLE	UL2725 [(28AWGx1P+28AWG*2C+A+B+D B:16/2/0.1TCCS)x1C BLACK JACKET OD3.8 MARKING:” 兎 AWM 2725 28AWG /1P+28AWG/2C VW-1 80°C 30V E202584 # C AWM 80°C兎 30V FT1 A E202584 # www. monoprice.com”	1	
4.	OUTER MOLD	45P PVC BLACK IN COLOR	2	
3.	INNER MOLD	PE NATURAL	1	
2.	CONNECTOR	USB MINI 5PIN M SHELL GOLD PLATED 1U	1	
1.	CONNECTOR	USB 2.0 A/M SHELL GOLD PLATED 1U INSULATOR WHITE	1	
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION :

Monoprice™ USB-A to Mini-B Cable - 5-Pin, 28/28AWG, Black

PID #:

DATE :

UNIT :

IN / FT / MM

FILE NAME:
