RoHS COMPLIANT

REVISION INFORMATION		
Rev.	Rev. Date	Brief Description
V1	2021.05.18	New

Length = 50 ft / 100 ft / 250 ft / 500 ft / 1,000 ft

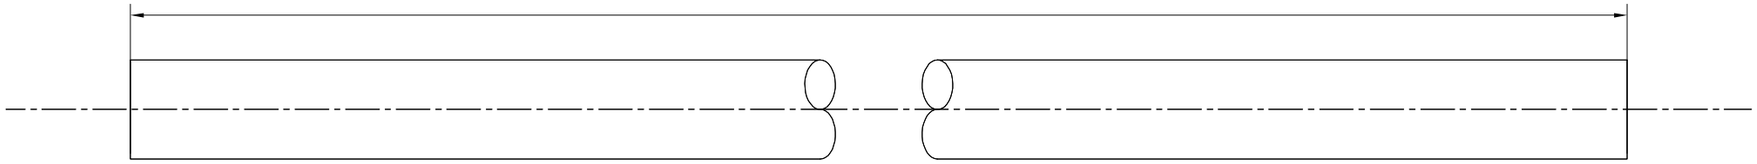

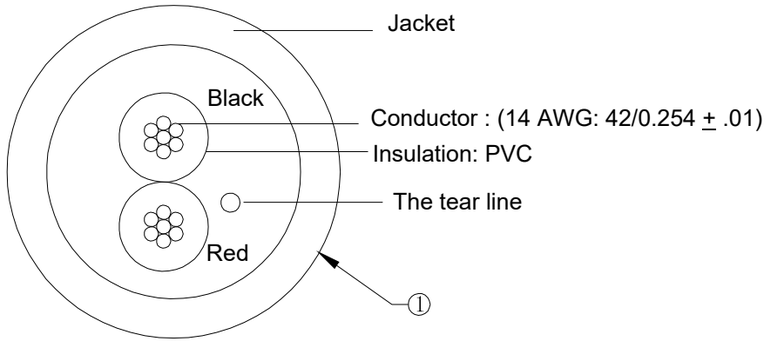

CROSS - SECTION OF CABLE

PID	Length	Color
41375	50 ft	Black
41376	100 ft	Black
41377	250 ft	Black
41382	500 ft	Black
41398	1,000 ft	Black

Conductor	Material / Size	Bare Copper (42/0.254 ± 0.01 mm)
Insulation	Material	PVC
	Diameter	2.6 ± 0.2 mm
	Colors	Black
	Elongation	Min 300%
	Tensile Strength	Min 1.48 Kgf/mm²
Jacket	Thickness	0.60 ± 0.1 mm
	Diameter	7.5 ± 0.2 mm
	Material	PVC
	Elongation	Min 100%
	Tensile Strength	Min 1.05Kgf/mm²
Others	"+" Skeleton	PE 0.40 ± 0.05*4.0 ± 0.05
	Rip cord	250D Nylon*3
Electical Performance	On resistance: ≤ 95.0 Ω Insulation resistance: ≥ 100M Ω	

Remarks:

1. Performace : Pass Fluke Permanent Link 90M

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
1	cable	Ø7.5[14#(42*0.254BC) * 2C (Red/Black/PVC 2.6)] black PVC Jacket, RoHS	1	pc

MONOPRICE

DESCRIPTION :
Monoprice Speaker Wire, CL2 Rated, 2-Conductor, 14AWG, Black (50 ft, 100 ft, 250 ft, 500 ft, 1,000 ft)

PID # : 41375, 41376, 41377, 41382, 41398

DATE :	UNIT :	FILE NAME:
2021/05/18	ft , mm	