RoHS COMPLIANT

REVISION INFORMATION		
Rev.	Rev. Date	Brief Description

Configuration:

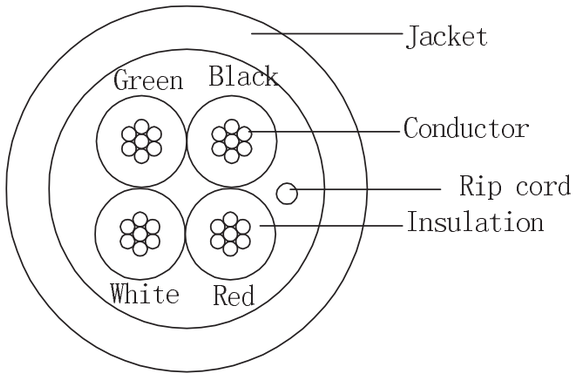

PID NO.	Length	Color
41386	100ft	Black
41387	250ft	Black
41399	1000ft	Black

Construction Item		Unit	Specification
AWG		AWG	14AWG
No., of Conductor		P,C	4C
Conductors	Material	---	Stranded bare copper
	Filler	---	-----
	Construction	No/mm	41/0.254BC±0.008
	Stranded diameter	mm	1.89
Insulators	Material	--	PVC
	Nom. Thickness	mm	0.38(Ref)
	Diameter	mm	2.65±0.1
	Color	---	Red, Black, White, Green
Filled	Material		750D NYLON
Jacket	Material	---	PVC
	Min. Thickness	mm	0.60
	Nom. Thickness	mm	0.75(Ref)
	0.D	mm	8.0±0.5
	Color	--	Black
Marking	MONOPRICE E482334 (UL) CL2 POWER LIMITED CIRCUIT CABLE 14AWG 4C STRANDED 2FT...4FT...1000FT		
	Marking color:white (Coil marking 02ft start to 100ft or 250ft or 1000ft stop)		

Electric Characters

1. Insulation resistance: >100 M (OHMS*KM MIN at 25°C)
2. Conductor resistalisternce: <8.94 (OHMS/KM MAX at 25°C)

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
3				
2				
1				

MONOPRICE

DESCRIPTION :
Monoprice™ Speaker Wire, CL2 Rated, 4-Conductor, 14AWG, Black

PID # : 41386, 41387, 41399

DATE :

UNIT : FT / IN

FILE NAME: