


Rev.	Rev. Date	Brief Description



Technical	
HDMI Compliance	HDMI 2.0
HDCP Compliance	HDCP 2.2
Video Bandwidth	594 MHz / 18 Gbps
Video Resolution	480i ~ 1080p50/60 Hz, 4K@24/30 Hz, 4K@60 Hz
HDR	HDR, HDR10+, Dolby Vision, HLG
Color Space	RGB, YCbCr 4:4:4 / 4:2:2, YUV 4:2:0
Color Depth	8/10/12-bit
Audio Formats	PCM 2.0: 32K, 44.1K, 48K, 16/20/24-bit Dolby Digital 2.0/5.1: 32K, 44.1K, 48K, 16/20/24-bit DTS 2.0/5.1: 32K, 44.1K, 48K, 16/20/24-bit
IR Level	12 Vp-p
Transmission Distance	328 ft / 100 m via R-6 Copper (75 ohms) coaxial cable

Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions (L x W x H)	Transmitter: 5.7" x 3.1" x 0.9" (144 x 78 x 23 mm) Receiver: 5.7" x 3.1" x 0.9" (144 x 78 x 23 mm)
Weight	Transmitter: 10.2 oz (288 g) Receiver: 10.2 oz (288 g)
Power Supply	Input: AC 100-240 V 50/60 Hz Output: DC 12 V / 1 A (US/EU standard, CE/FCC/UL certified)
Power Consumption	Transmitter: 7.92 W Receiver: 6.72 W
Operating Temperature	32~104 °F / 0~40 °C
Storage Temperature	-4~140 °F / -20~60 °C
Relative Humidity	20-90% RH (no condensation)

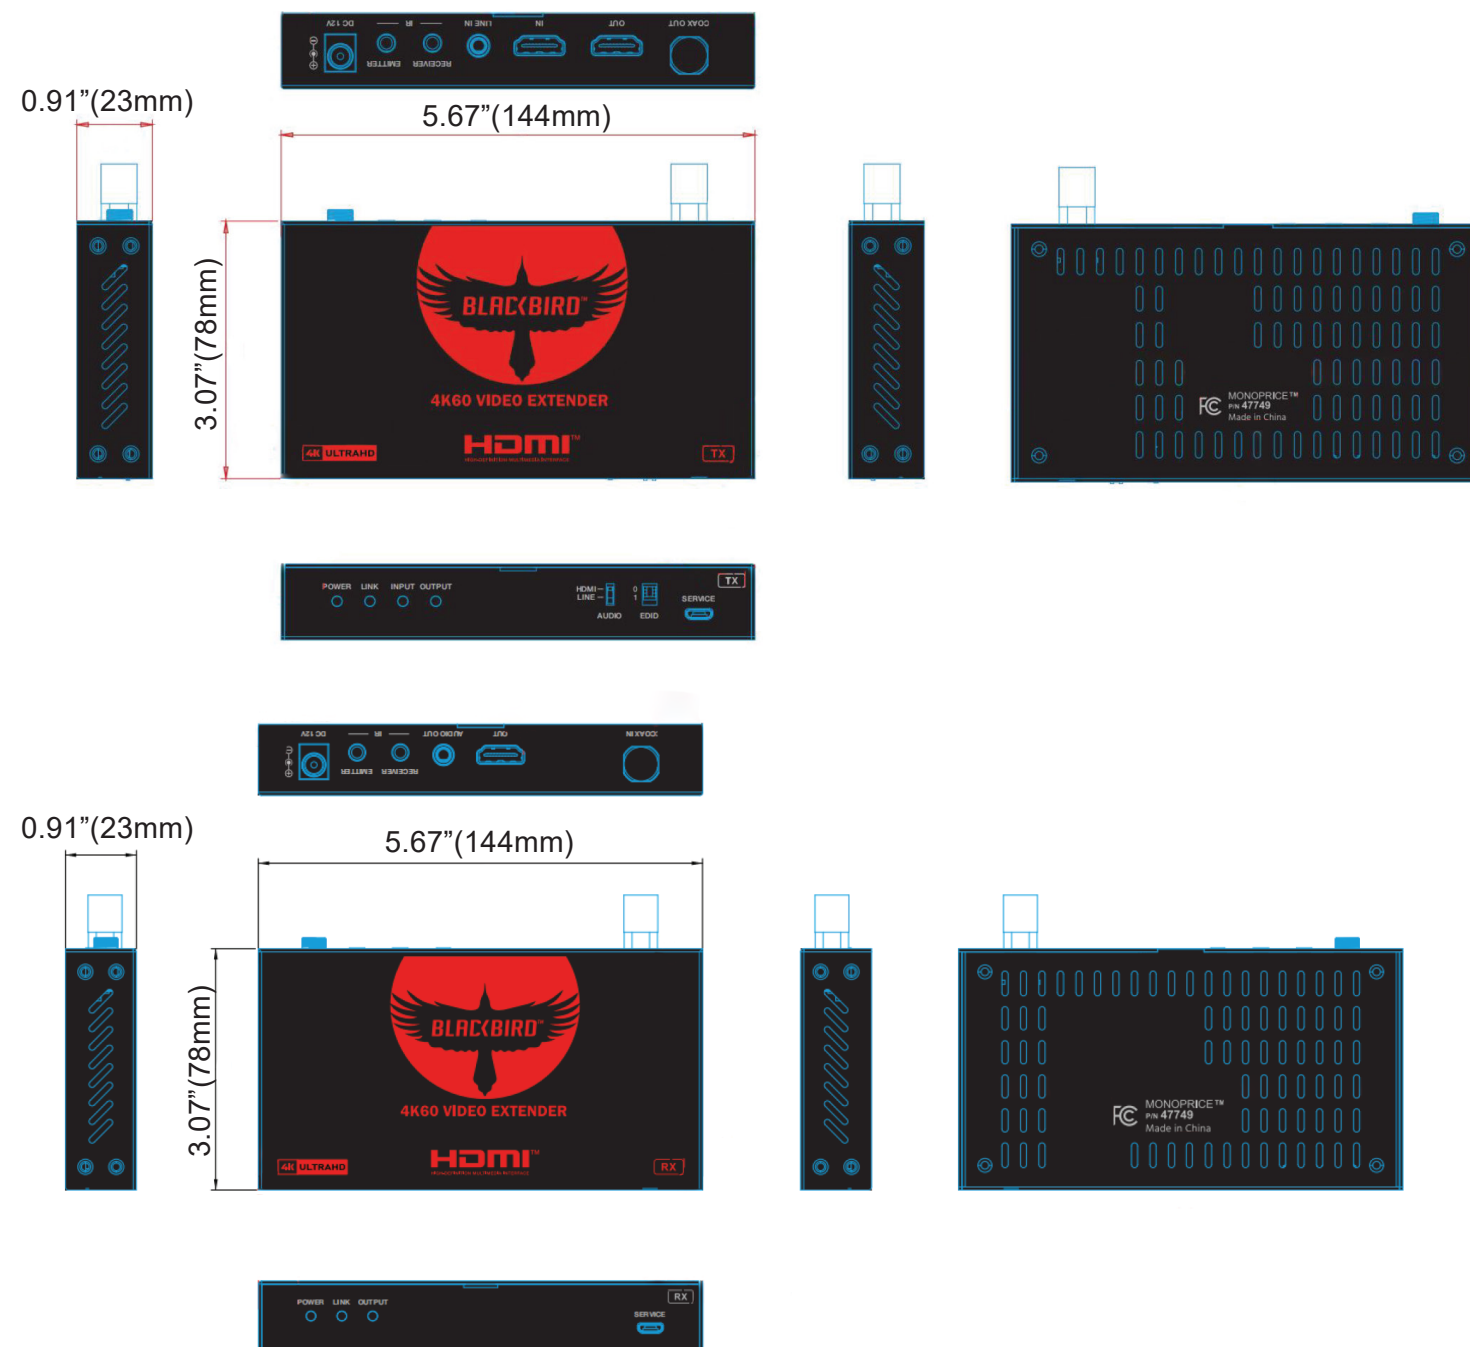

DESCRIPTION :		
Blackbird 4K60 Video Extender with HDMI over Coaxial Cable, up to 100m		
PID # : 47749		
DATE :	UNIT : IN / MM	FILE NAME:

4	User Manual	User Manual	1	PCS
3	Power Adapter	12V/1A Locking Power Adapter-US Type	2	PCS
2	IR Cable	IR Blaster & IR Receiver Cable (1.5m)	1	Pair
1	Main Unit	HDMI over COAXIAL Extender (TX & RX)	1	Set
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT