



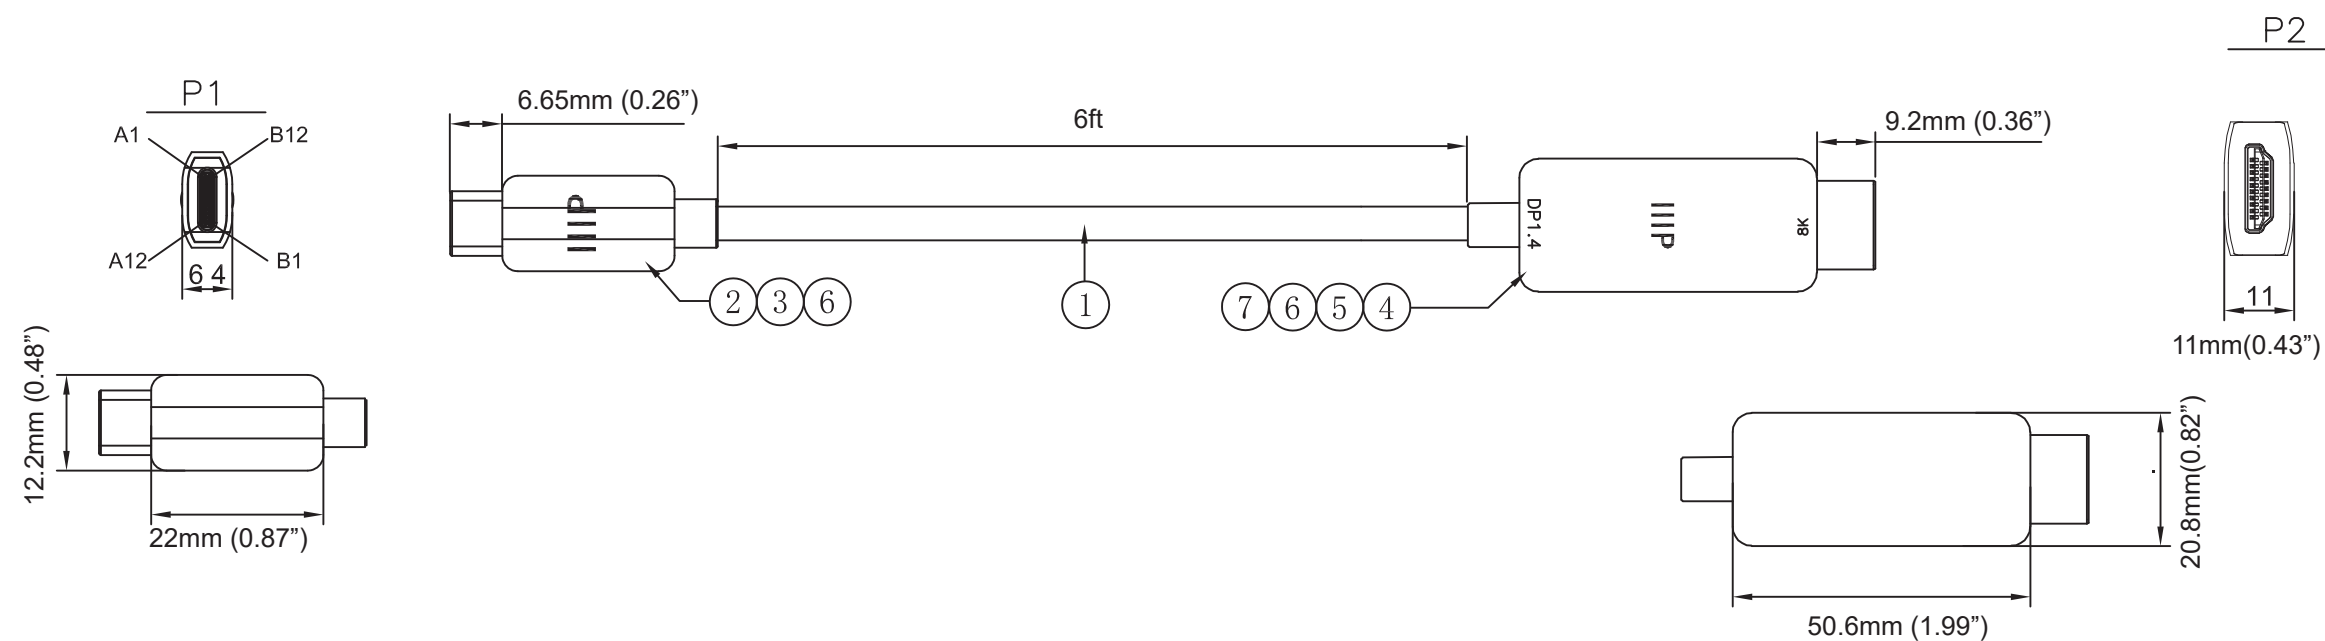

Electrical Test:

1、 100% Test(open,short,miss wire)

- Features:
- Support DP1.4 Alt mode, downward compatible with DP1.2 Alt mode
- Support HDMI max 8K/60Hz, 4K/240Hz
- Support Dynamic HDR10+
- Support HDCP1.4 & HDCP2.3 specification
- Support DSC 1.1/1.2a decoder
- Support 8/10/12 bit color depth
- Support pixel format RGB/YCbCr4:4:4/2:2/4:2:0
- Support LPCM audio max 192KHz
- Support HBR audio 768KHz
- Support 3D audio 96KHz

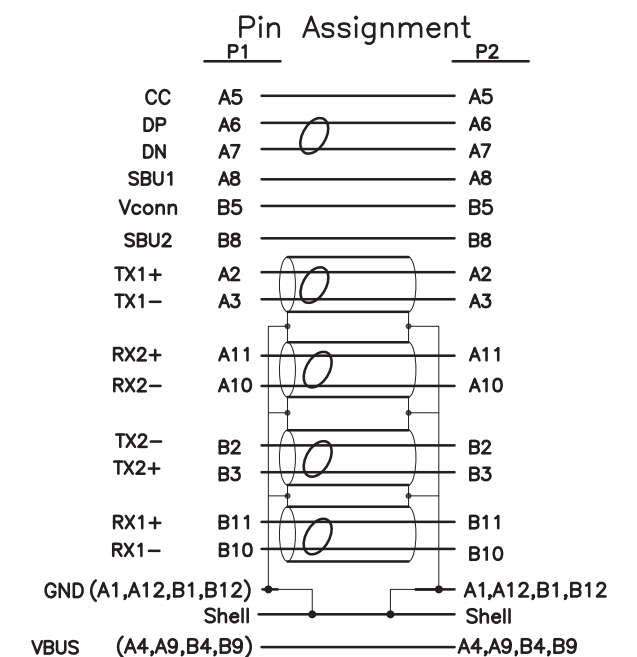

7	CAP	HDMI DUST CAP	1	PCS
6	MOLDING	TPE~BLACK	VR	PCS
5	SHELL	UTCH8-3M-DPI. 4-SP-PRO (RTD) ~SHELL~ABS~BLACK	1	PCS
4	TUBE	UTCH8-3M-DPI. 4-SP-PRO (RTD) ~PCB-SMT~IC:RTD2175U	1	PCS
3	SHELL	USB-C ~SHELL~ABS~BLACK	1	PCS
2	CONN	USB-C MALE CONNECTOR~SHELL NI PLATED-PIN GOLD~WITH PCB	1	PCS
1	WIRE	USB 3.2~[34AWG (7/0. 06TC)+EAM]*4P+34AWG(7/0.06TC)*2C+24AWG(41/0.08TC) *2C+34AWG(7/0.06TC) *4C+AB (75%TC) OD:4.2MM~TPE~BLACK~NO MARKING	2	M
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION :

Monoprice™ USB-C to HDMI Active Cable - 8K60Hz, HDR10+, DSC, 6ft, Black

PID #: 47796

DATE :

UNIT:

FILE NAME:
