RoHS COMPLIANT

REVISION INFORMATION		
Rev.	Rev. Date	Brief Description

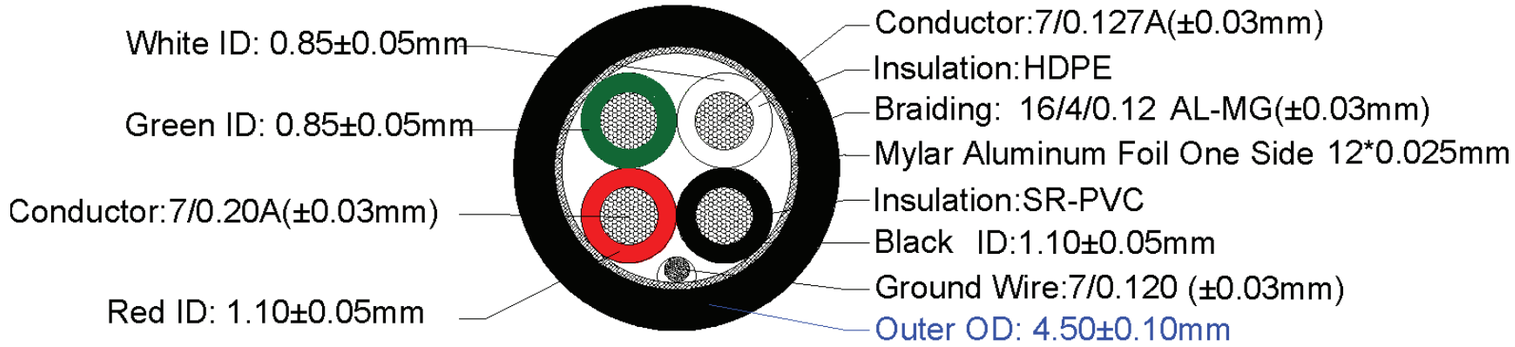

	Material	/	Bare Copper Wire	Bare Copper Wire
	Construction	pcs/mm	7/0.127A±0.003MM	7/0.20A±0.003MM
Insulation	Material	/	HDPE	SR-PVC 35P
	Min. Thickness	mm	0.23	0.22
	Diameter	mm	Φ0.85∓0.05	Φ1.10 ∓0.05
	Color	/	White、Green	Red、Black
Overall Shield	Material	/	AL-Mylar	
	Width	/	12*0.025mm	
	Overlap Rate	/	25%(REF)	
Ground	Material	/	Bare Copper Wire	
	Construction	pcs/mm	7/0.120±0.003	
Braid	Material	/	Alumunium Magnesium Wire	
	Construction	pcs/mm	16 / 4 / 0.12±0.003MM	
Jacket	Material	/	PVC	
	Min. Thickness	mm	0.6REF	
	Diameter	mm	Φ4.50∓0.2	
	Color	/	Black	
Marking	**AWM 2725 28AWG/1P+24AWG/2C VW-1 80°C 30V E202584-S**			
	C AWM 80°C 30V FT1 I A E202584-S www.monoprice.com			
Cable Length	**L=3030±10MM**			

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

MONOPRICE

DESCRIPTION :
Monoprice™ USB-A to USB-A 2.0 Cable - 28/24AWG, Gold Plated, Black, 10ft

PID # : 5444

DATE :

UNIT : IN / MM

FILE NAME: