




1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME	Monoprice					DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.						2017.04.19	A/0	NEW	LJW




P1



P2

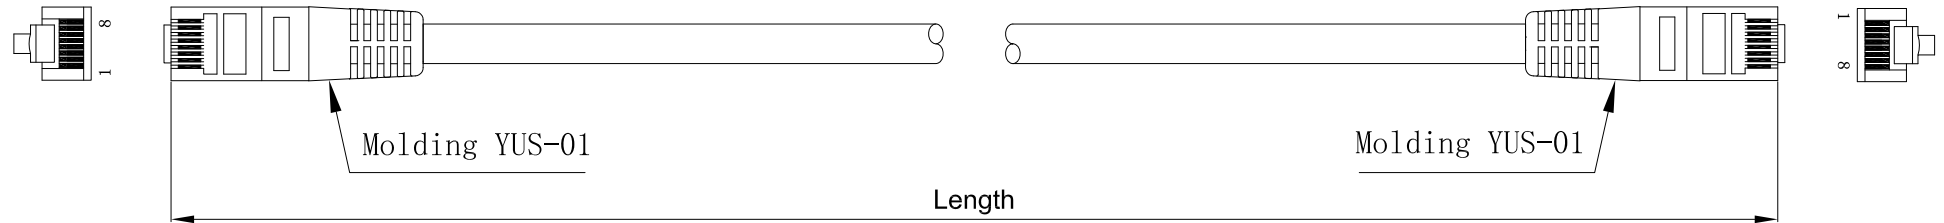

Marking: **YFC Monoprice CAT.6A SSTP PATCH 3P VERIFIED TO ISO/IEC 11801 ED.2 & ANSI/TIA-568-C.2 & IEC 60332-1-2 ▲ 26AWGX4P CMX(UL) E164469-XX RoHS COMPLIANCE V10277 WWW.MONOPRICE.COM**

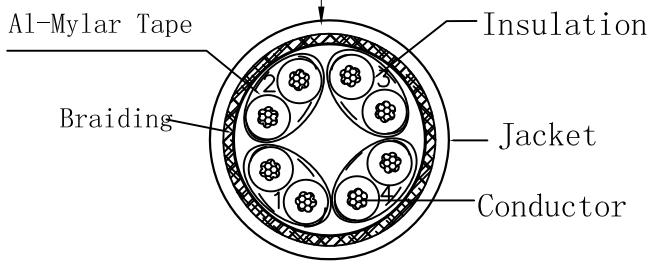

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1	↔	1	WHT/ORG
2	↔	2	ORG
3	↔	3	WHT/GRN
6	↔	6	GRN
4	↔	4	BLU
5	↔	5	WHT/BLU
7	↔	7	WHT/BRN
8	↔	8	BRN

Conductor	Bare Copper 26AWG
Insulation	Thickness:MIN at any point:0.2mm MAX AVG:0.35mm Diameter:1.05±0.06mm
Jacket	PVC Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.7±0.2mm
Wire	CAT.6A SSTP 26AWG*4P
Plug	YUS-01 8P8C 50u"
Color	BU004
Length	0.15M±15mm

**M MONOPRICE**

Part No.			
Description	CAT 6A SSTP 26AWG PVC YUS-01		
UNIT	mm	APPROVAL	CHECKER
PAGE	1/1	2017.04.20	DRAWER
Draw.No.		鍾曙光	LJW